

# PATENT COOPERATION TREATY

## PCT

### NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
US Department of Commerce  
United States Patent and Trademark  
Office, PCT  
2011 South Clark Place Room  
CP2/5C24  
Arlington, VA 22202  
ETATS-UNIS D'AMERIQUE  
in its capacity as elected Office

<b>Date of mailing (day/month/year)</b> 06 November 2001 (06.11.01)	<b>Applicant's or agent's file reference</b> T8-465681WO
<b>International application No.</b> PCT/CA01/00303	<b>Priority date (day/month/year)</b> 13 March 2000 (13.03.00)
<b>International filing date (day/month/year)</b> 13 March 2001 (13.03.01)	<b>Applicant</b> SPICER, Steven et al

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

02 October 2001 (02.10.01)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

<b>The International Bureau of WIPO</b> 34, chemin des Colombettes 1211 Geneva 20, Switzerland  Facsimile No.: (41-22) 740.14.35	<b>Authorized officer</b>  Eric LESOT (Fax 338.87.40)  Telephone No.: (41-22) 338.83.38
--	---

---

**This Page Blank (uspto)**

**LIMITED-BANDWIDTH  
ELECTRONIC DATA COMMUNICATION SYSTEM**

**FIELD OF THE INVENTION**

- 5 The present invention relates to a method and system for data communication over a network. In particular, the present invention relates to a method and system for transmitting electronic messages over a limited bandwidth network, such as a wireless network.

10 **BACKGROUND OF THE INVENTION**

- Wireless communications devices, such as e-mail pagers, wireless telephones and personal data assistants, have become increasingly popular due to their ability to provide users with electronic messaging capabilities outside the confines of the office workplace. To enhance the portability and battery life of such devices, the typical
- 15 wireless communications device includes a low powered microprocessor, limited memory resources, and a low resolution display. However, notwithstanding the popularity of these devices, the conventional wireless communications device is deficient in a number of respects.

- 20 First, given the limited computational capabilities of these devices, it is often difficult to receive and process messages having dense or complex informational content, such as messages which include images, sound effects and/or complex textual formatting. This problem is compounded by limitations in wireless bandwidth.

- 25 Second, often an originator of an e-mail message will attach a non-MIME-based document to the MIME-based section of the message. For example, the originator of the e-mail message might attach a document created with word processor software, spreadsheet software or graphics presentation software. Given that each document type can have any of variety of different file formats, it often difficult, if not
- 30 impossible, to view the content of document attachments on the conventional wireless communications device given the limited computational capabilities of these devices.

Third, the computational and display resolution capabilities of these devices can vary considerably from manufacturer to manufacturer. Consequently, an electronic

message configured for reception and review on one wireless communications device may not be accurately displayed on another wireless communications device.

5 Fourth, users of wireless communications devices typically must pay their respective wireless service provider for the wireless service in accordance with the volume of data received with their device. Since the user of the wireless communications device cannot preview the electronic message prior to receipt on their device, the cost associated with the ownership of these devices can be prohibitive.

10 Therefore, there remains a need for an electronic data communication system for message transmission to wireless communications devices which recognizes the computational power and bandwidth limitations associated with these devices, the varied computational and display capabilities of these devices, the variety of available electronic message formats, and the costs associated with ownership and operation of  
15 these devices.

#### SUMMARY OF THE INVENTION

According to a first aspect of the present invention, there is provided an electronic transmission system and a method of electronic data transmission which addresses at  
20 least one deficiency of the conventional electronic message communication system.

According to a second aspect of the present invention, there is provided an electronic data terminal and a method of electronic data transmission which addresses which  
25 addresses at least one deficiency of the conventional electronic message transmission system.

The electronic data transmission system, according to the first aspect of the present invention, includes a data receiver, a data formatter and a data transmitter. The data receiver is configured to receive a request for transmission of electronic data to a  
30 network terminal over a communications network, with the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data. The data formatter is in communication with the data receiver for formatting the electronic data in accordance with the data filtration parameter. The

data transmitter is in communication with the data formatter for transmitting the formatted data to the network terminal over the communications network.

5 The method of electronic data transmission, according to the first aspect of the present invention, includes the steps of (1) receiving a request for transmission of electronic data over a communications network to a network terminal, the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data; (2) formatting the electronic data in accordance with the data filtration parameter; and (3) transmitting the formatted data to the network terminal over the  
10 communications network.

The electronic data terminal, according to the second aspect of the present invention, includes a data receiver, a data reformatter and a data transmitter. The data receiver is configured to receive over a communications network a data package from a data  
15 server. The data reformatter is in communication with the data receiver for extracting electronic data from the data package. The data transmitter is in communication with the data formatter for providing the data server with a request for retransmission of the electronic data, with the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

20 The method of electronic data transmission, according to the second aspect of the present invention, includes the steps of (1) receiving over a communications network a data package from a data server; (2) extracting electronic data from the data package; and (3) in accordance with a resolution of the extracted electronic data  
25 providing the data server with a request for retransmission of the electronic data, the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

In accordance with one implementation of the invention, using the data transmitter an  
30 operator of an electronic data terminal transmits a request for transmission of an electronic message from the electronic data transmission system to the electronic data terminal. Upon receipt of the transmission request, the data formatter of the electronic data transmission system formats the electronic message in accordance with a default filtration parameter associated with the electronic data terminal, and assembles the

electronic message as part of an electronic data package. Alternately, the retransmission request may include at least one data filtration parameter defining a desired alternate resolution for the electronic message, in which case the data formatter of the electronic data transmission system formats the electronic message in accordance with the specified filtration parameter. Typical filtration parameters may require replacement of particular words with recognized abbreviations, removal of font and attribute data, replacement of formatting data with format tags to reduce a byte length of the electronic data, and/or removal of graphics data from the electronic data.

10

When the formatting step is completed, the data transmitter of the electronic data transmission system transmits the electronic data package to the electronic data terminal. Upon receipt of the electronic data package, the data reformatter of the electronic data terminal extracts the electronic message from the data package for review by the operator of the electronic data terminal. If the operator of the electronic data terminal concludes that the resolution of the extracted electronic message is unsatisfactory, the operator can transmit a request to the electronic data transmission system for retransmission of the electronic message. The retransmission request includes at least one data filtration parameter defining the desired alternate resolution for the electronic message.

20

Alternately, if the operator desires that the electronic message be transmitted to a network resource, such as a network printer, the operator transmits a request to the electronic data transmitter for retransmission of the electronic message. Upon receipt of the retransmission request, the electronic data transmission system queries a central resource registry to identify a user access level for the specified network resource, and then determines from the access level defined for the network resource whether the electronic data terminal is authorized for communication with the specified network resource. The electronic data transmission system then transmits the original unfiltered electronic message to the network resource in accordance with the determined authorization.

25

30

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be described, by way of example only, with reference to the drawings, in which:

Fig. 1 is a schematic view of a limited-bandwidth electronic data communication system, showing the electronic data transmission system and the network terminals according to the present invention;

Fig. 2 is a schematic view of the electronic data transmission system depicted in Fig. 1, showing the data receiver, the data formatter and the data transmitter of the electronic data transmission system;

Fig. 3 is a schematic view of one of the network terminals depicted in Fig. 1, showing the data receiver, the data reformatter and the data transmitter of the data terminal;

Fig. 4 is a flow chart depicting the method of transmitting electronic data between the electronic data transmission system and one of the network terminals; and

Fig. 5 is a flow chart depicting the method of transmitting the electronic data between one of the network terminals and a network resource via the electronic data transmission system.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

Turning to Fig. 1, a limited-bandwidth electronic data communication system, denoted generally as 100, is shown comprising an electronic data server 102, a network resource 104, a resource registry 106, an electronic data transmission system 200 in communication with the electronic data server 102, and a network terminal 300. Typically, the electronic data communication system 100 includes a plurality of the electronic data servers 102, a plurality of the network resources 106, a plurality of the electronic data transmission systems 200, and a plurality of the network terminals 300, however for enhanced clarity of discussion, Fig. 1 only shows a single electronic data server 102, a single network resource 104, a single electronic data transmission system 200, and a single network terminal 300. Further, any of the network resources 104 and the network terminals 300 may comprise either land-based communications devices or wireless communications devices.

The electronic data communication system 100 also includes a land-based communications network 108 for facilitating communication between the electronic data server 102, land-based versions of the network resources 104, the resource registry 106, the electronic data transmission system 200, and land-based versions of the network terminals 300. Preferably, the electronic data server 102 is accessible to the electronic data transmission system 200 over a secure communication channel 110 established between the electronic data server 102 and the electronic data transmission system 200, however the electronic data server 102 may also be accessible to the electronic data transmission system 200 over the land-based communications network 108. In addition to the land-based communications network 108, preferably the electronic data communication system 100 includes a wireless communications network 112 for facilitating communication between wireless versions of the network resources 104, the electronic data transmission system 200, and wireless versions of the network terminals 300. However, it should be understood that the electronic data communication system 100 is not limited to the foregoing network configuration, but instead may comprise a single land-based network or a single wireless network, as the requirements of the network resources 104 and the network terminals 300 dictate.

Preferably, the land-based communications network 108 comprises the Internet, and the electronic data servers 102 comprise land-based network-enabled POP3 e-mail servers for receiving and storing electronic mail messages received from remote SMTP e-mail servers over the Internet. However, the electronic data servers 102 need not be e-mail servers, but instead may comprise any computer server which is configured to transmit electronic data to one of the electronic data transmission systems 200. For instance, any of the electronic data servers 102 may comprise a music file server, an image file server, a multimedia file server, a File Transfer Protocol (FTP) server, or even a Hyper-Text Markup Language (HTML) World Wide Web server.

Typically, each network resource 104 comprises a printing device, and in particular, an IPP-compliant printer. However, the network resources 104 need not only be networked printers (IPP-compliant or otherwise), but instead may comprise any of a variety of data communication devices, including facsimile machines, image servers and file servers. Further, as discussed above, the electronic data communication



system 100 is not limited for use with land-based data communications devices, but instead can be used to provide access to wireless communications devices. For instance, any of the network resources 104 may comprise e-mail pagers or e-mail enabled wireless telephones. Typically, the network resources 104 are directly accessible over the respective communications network 108, 112. For instance, one of the network resources 104 may comprises an IPP-capable printer or facsimile machine. However, in one variation, at least one of the network resources 104 is not directly accessible over the respective communications network 108, 112, but instead is indirectly accessible over the communications network 108, 112 via a suitable server.

The resource registry 106 comprises a computer server configured for interfacing with the communications network 108, and includes a resource database 114 and a user registration database 116. The resource database 114 includes resource records identifying parameters associated with the network resources 104. Preferably, each resource record includes a network address field, a resource type field, and a user access level field for the associated network resource 104.

The network address field identifies the network address of the network resource 104. If the network resource 104 is directly accessible over the communications network 108, the network address field identifies the network address of the network resource 104. However, if the network resource 104 is not directly accessible over the communications network 108, but instead is linked to the communications network 108 via a suitable server, the network address field identifies the network address of the server associated with the network resource 104.

The resource type field identifies the type of data communication device of the network resource 104. For instance, the resource type field may specify that the network resource 104 is a printer, a plotter, a facsimile machine, an image server or a file server. Further, the resource type field may include a resource type sub-field specifying a sub-class of the network resource type. For example, the resource type sub-field may specify that the network resource is an IPP-capable printer or facsimile machine, or a non-IPP-capable printer or facsimile machine.

The user access level field identifies the type of communications access which the network terminals 300 are allowed to have in regards to the associated network resource 104. In the embodiment, as presently envisaged, the user access level field establishes that the network resource 104 allows one of:

5

(a) "public access" in which any network terminal 300 of the electronic data communication system 100 can communicate with the network resource 104;

10

(b) "private access" in which only members (eg. employees) of the enterprise associated with the network resource 104 can communicate with the network resource 104; and

(c) "authorized access" in which only particular network terminals 300 can communicate with the network resource 104.

15 If the user access level field specifies "authorized access" for a network resource 104, preferably the user access level field includes a sub-field which lists the network addresses of the network terminals 300 authorized to access the network resource 104, and a sub-field which includes an authorization password which the identified network terminals 300 must provide in order to access the network resource 104. If  
20 the user access level field specifies "private access" for a network resource 104, preferably the user access level field includes a sub-field which lists the network addresses of the network terminals 300 which are deemed to members of the enterprise.

25 It should be understood, however, that the user access level field is not limited to identifying only the foregoing predefined user access levels, but may instead identify more than one of the predefined user access levels, or other user access levels altogether. For instance, the user access level field may identify that the associated network resource 104 allows both private access to all employees of the enterprise  
30 responsible for operation of the network resource 104, and authorized access to other pre-identified network terminals 300. Further, the user access level field may also include one or more sub-fields which provide additional restrictions/permissions on the type of communications access which the network terminals 300 are allowed to have in regards to the associated network resource 104. For instance, the user access

level sub-fields may limit the hours of operation of the network resource 104, or may place restrictions on the type of access limitations on a per-user basis, or per-group basis. Other variations on the type of access will be readily apparent, and are intended to be encompassed by the scope of the present invention.

5

Preferably, each resource record also includes an information field which provides additional information on the network resource 104, such as data handling capabilities, resource pricing and geographical co-ordinates. This latter parameter is particularly advantageous for use with mobile network terminals 300, such as a  
10 wireless-enabled personal data assistant or an e-mail-enabled wireless telephone, since it allows the network terminal 300 to identify the nearest one of a plurality of available network resources 104. In addition, each resource record includes a pseudo-name field, and a username/password field. The pseudo-name field contains a resource pseudo-name which identifies the network resource 104 to the network  
15 terminals 300. Preferably, the pseudo-name is a network alias that identifies the physical location and properties of the network resource 104, but does not identify the network address of the resource 104. The username/password field contains a unique username and password combination uniquely associated with the administrator of the associated network resource 104.

20

The user registration database 116 of the resource registry 106 includes user records each uniquely associated with an operator of a respective network terminal 300. Preferably, each user record identifies the registered user's name, post office address and/or e-mail address, and a default filtration parameter (discussed below) for the  
25 transmission of electronic data to the operator's wireless terminal 300. In addition, each user record specifies a password uniquely associated with the operator which the operator must specify in order to receive secure electronic data from the data server 102, and to update the operator's user record and to obtain access to network resources 104 configured for "authorized access".

30

The resource registry 106 is configured to provide administrators of the network resources 104 with controlled access to the records of the resource database 114 to allow the administrators to update the network address field, the resource type field, the user access level field, the resource information field, the pseudo-name field, and

-10-

the username/password field of the resource record for the associated network resource 104. This mechanism allows network administrators to change, for example, the network address and/or the restrictions/permissions of the network resources 104 under their control, or even the network resource 104 itself, without having to notify each network terminal 300 of the change. The resource registry 106 is also configured to provide controlled access to the records of the user registration database 116 so that only the operator of the network terminal 300 which established the user record can update the user record.

As shown in Fig. 2, each electronic data transmission system 200 is provided as a network-enabled computer server and comprises a land-based network interface 202 for interfacing with the land-based communications network 108, a wireless network interface 204 for interfacing with the wireless network 112, and a data processing system 206 in communication with the land-based network interface 202 and the wireless network interface 204. Typically, the land-based network interface 202 comprises an Ethernet network circuit card and the wireless network interface 204 comprises an RF antenna, however the electronic data transmitter 200 need not include both a land-based network interface 202 and a wireless network interface 204 but instead could be limited to only a land-based network interface 202 or a wireless network interface 204 as dictated by the network configuration.

The wireless network interface 204 typically is configured as a data receiver for receiving a transmission request for transmission of electronic data over the wireless communications network 112 to one of the network terminals 300. The land-based network interface 202 typically is configured to transmit the transmission request to the data server 102 over the land-based communications network 108, and to receive the requested electronic data from the data server 102. Typically, the electronic data comprises an e-mail message having an attachment document, however the electronic data can comprise other data forms, as discussed above, such as an HTML e-mail message, an electronic sound/music file, an electronic image file or an HTML document.

The data processing system 206 includes a central processing unit (CPU) 208, and a non-volatile memory storage device (DISC) 210 (such as a magnetic disc memory or

electronic memory) and a read/write memory (RAM) 212 both in communication with the CPU 208. Preferably, the DISC 210 includes a dictionary database 211 which includes a table of recognized words or phrases and associated pre-defined binary phrase tags. As will be explained, the data processing system 206 uses the dictionary database 21 to convert pre-established words and/or phrases into binary phrase tags in order to reduce the byte size of the electronic data transmitted to the network terminal 300..

The DISC 210 also includes data which, when loaded into the RAM 212, comprise processor instructions for the CPU 208. The processor instructions establish in the RAM 212 one or more memory objects defining a data format processor 214 and an authorization processor 222 in communication with the network interfaces 202, 204. Typically, the data format processor 214 comprises a format reorganizer 216, a data formatter 218, and a data compressor 220.

The format reorganizer 216 is configured to convert the received electronic data from the original format to a less memory-intensive format. For instance, if the electronic data comprises the attachment to an e-mail message, and the attachment comprises an electronic spreadsheet data file, the format reorganizer 216 would calculate the values of each cell of the spreadsheet and output the resulting numbers. Consequently the number of bytes occupied by the electronic data would be reduced since the electronic data would no longer include the spreadsheet formulae. Alternately, if the attachment comprises a raster image, such as a facsimile transmission, the format reorganizer would convert the image data to text data, thereby again reducing the number of bytes occupied by the electronic data.

The data formatter 218 is in communication with the output of the format reorganizer 216, and is configured to format the electronic data in accordance with one or more data filtration parameters. The data filtration parameters may comprise either default filtration parameters for the network terminal 300, or filtration parameters received from the network terminal 300 together with the transmission request. If the electronic data comprises a text message either attached to an e-mail message or included in the body of an e-mail message, appropriate filtration parameters include:

-12-

- (a) a "space parameter" for instructing the data formatter 218 to remove one or more of white space, line spacing data and tabbing data from the text of the e-mail message;
- (b) a "punctuation parameter" for instructing the data formatter 218 to remove punctuation from the text of the e-mail message;
- (c) a "font parameter" for instructing the data formatter 218 to remove from the e-mail attachment font data and/or attribute data associated with the text of the e-mail message;
- (d) a "graphics parameter" for instructing the data formatter 218 to remove any graphics data from the e-mail message;
- (e) a "formatting parameter" for instructing the data formatter 218 to replacing paragraph formatting data, such as paragraph justification data and indent data from the text of the e-mail message with predefined format tags;
- (f) a "word abbreviation parameter" for instructing the data formatter 218 to replace recognized words in the e-mail message with pre-defined word abbreviations; and
- (g) a "dictionary lookup parameter" for instructing the data formatter 218 to replace recognized words or phrases in the e-mail message with pre-defined phrase tags for reducing the byte length of the electronic data

As will be apparent, the foregoing list of filtration parameters is not exhaustive, but may be expanded in accordance with the context of the electronic data. Preferably, the data formatter 218 is configured with a sufficient number of filtration parameters so as to offer several levels of data filtration. Further, the filtration parameters are not limited for use with e-mail attachments, but can also be used in association with the body of an e-mail message. In addition, the filtration parameters are not limited for use with electronic text data, but can be used with other forms of electronic data, such as electronic music files or electronic image files. For instance, if the data server 102 includes electronic music files, the data formatter 218 can be configured to convert stereo channel data to mono channel data, or to boost or reduce the gain of selected ranges of frequencies. If the data server 102 includes electronic image files, the data formatter 218 can be configured to reduce the resolution of the image in accordance with the graphics handling capabilities of the network terminal 300. Other forms of

filtration parameters will be apparent to those of ordinary skill, and are intended to be encompassed by the present invention.

5 The data compressor 220 is configured to compress the formatted electronic data to further reduce the size of the data transmission to the network terminals 300. Preferably, the data compressor 220 is configured to use a standard compression algorithm, such as LZW, to compress the data, however the data compressor 220 may also be configured to use a proprietary compression algorithm suited to the content of the electronic data.

10 The authorization processor 222 of the data processing system 206 is provided to determine whether the network terminal 300 is authorized to transmit data to selected network resources 104, and to facilitate the transmission of electronic data between the data server 102 and the selected network resource 104 upon command from then  
15 network terminal 300. This aspect of the invention will be explained in greater detail below.

20 Preferably, each network terminal 300 is provided as a network-enabled wireless communications device, such as a wireless-enabled personal data assistant or an e-mail-enabled wireless telephone. However, the network terminals 300 may instead comprise land-based network-enabled communications devices, such as portable computers, or a mixture of wireless and land-based communications devices. As shown in Fig. 3, the network terminal 300 comprises a wireless network interface 302 for interfacing the network terminal 300 with the wireless communications network  
25 112, a user interface 304, and a data processing system 306 in communication with the network interface 302 and the wireless network interface 304. Preferably, the user interface 304 comprises a data entry device 308 (such as keyboard, microphone or writing tablet), and a display device 310 (such as a CRT or LCD display). However, as will be apparent, if the data server 102 contains music files, the user interface 308  
30 will include a speaker instead of the display device 310.

The data processing system 306 includes a central processing unit (CPU) 312, and a non-volatile memory storage device (ROM) 314 (such as an electronic memory) and a read/write memory (RAM) 316 both in communication with the CPU 312.

-14-

Preferably, the ROM 314 includes a dictionary database 318 which includes a table of recognized words or phrases and associated pre-defined binary phrase tags. As will be explained, the data processing system 306 uses the dictionary database 318 to convert phrase tags received in electronic data transmitted to the network terminal 300 into the corresponding text.

The ROM 314 also includes data which, when loaded into the RAM 316, comprise processor instructions for the CPU 312. The processor instructions establish in the RAM 316 one or more memory objects defining a data reprocessor 320 in communication with the network interface 302, the user interface 304 and the dictionary database 318. Typically, the data reprocessor 320 comprises a data decompressor 322 and a data reformatter 324.

The wireless network interface 302 typically is configured as a data transmitter to provide the wireless communications network 112 with a request for transmission of electronic data. As discussed above, the transmission request can include one or more filtration parameters. The wireless network interface 302 is also configured as a data receiver for receiving an electronic data package from the electronic data transmission system 200 over the wireless communications network 112 in response to the transmission request. The data decompressor 322 is configured to decompress the compressed electronic data received from the electronic data transmission system 200, and to extract the decompressed formatted electronic data from the received data package. The data reformatter 324 is configured to reformat the formatted electronic data using the format tags and the pre-defined phrase tags included in the electronic data, and then to transmit the extracted electronic data to the display device 310 for review.

The process by which an operator of a network terminal 300 receives and transmits electronic data with the network terminal 300 will now be described with reference to Fig. 4. At step 400, the operator of the network terminal 300 logs in to the electronic data communication system 100 by transmitting to the electronic data transmission system 200 the operator's name and assigned password. By logging in to the electronic data communication system 100, the operator will have access to any network resources 104 which have "authorized access" as the user access level and



-15-

which have identified the operator as a user authorized to access the network resource 104. However, it should be appreciated that the operator need not log in to the electronic data communication system 100, however the operator will then only have access to the network resources 104 which have established "public access" as the user access level.

At step 402, the electronic data transmission system 200 queries the user registration database 116 with the operator's username and password (if provided) to verify the identity of the operator. The electronic data transmission system 200 then queries the data server 102 for a list of all electronic data available to the operator of the network terminal 300. In the instance where the data server 102 is a POP3 e-mail server, the electronic data transmission system 200 logs in to the data server 102 by providing the data server 102 with the username and password in accordance with the POP3 authentication protocol.

If the username and password is authenticated, the data server 102 transmits to the electronic data transmission system 200 a list of all items of electronic data available to the operator of the network terminal 300. Typically, the electronic data listing will include data identifiers uniquely associated with each item of electronic data, together with a subject field identifying the subject of the associated item of electronic data. The electronic data transmission system 200 then transmits the electronic data listing to the network terminal 300 over the wireless network 112.

Upon receipt, the data processing system 306 displays the subject fields of the electronic data listing on the display device 310. The operator of the network terminal 300 selects an item of electronic data from the electronic data listing for review using the data entry device 308 of the network terminal 300, at step 404, and then transmits the data identifier of the selected electronic data item to the electronic data transmission system 200 over the wireless network 112.

The electronic data transmission system 200 transmits the data identifier to the data server 102, at step 406, requesting transmission of the identified electronic data item. As will be appreciated, if the data server 102 comprises a POP3 e-mail server, the

-16-

electronic data transmission system 200 transmits the data identifier to the data server 102 in accordance with the POP3 authentication protocol.

Typically, the operator of the network terminal 300 initially will not specify a filtration parameter when transmitting the data identifier to the electronic data transmission system 200. Accordingly, upon receipt of the electronic data item from the data server 102, the data processing system 206 of the electronic data transmission system 200 will query the user registration database 116 with the operator's username and password to determine the default filtration parameter for the operator's wireless terminal 300. Alternately, however, the operator of the network terminal 300 may transmit a filtration parameter with the data identifier, if the default filtration is not desired.

At step 408, the format reorganizer 216 of the electronic data transmission system 200 converts the electronic data received from the data server into a less memory-intensive format. If no filtration parameter is specified, the data formatter 218 of the electronic data transmission system 200 formats the electronic data received from the format reorganizer 216 in accordance with the default filtration parameter. However, if a filtration parameter is specified, the data formatter 218 formats the electronic data in accordance with the specified filtration parameter.

The formatting parameter may instruct the data formatter 218 to perform any of a number of different formatting operations on the electronic data. As discussed above, if the data server 102 comprises an e-mail server, the parameter may instruct the data formatter 218 to perform any of a variety of different e-mail formatting operations on the e-mail message, including the following formatting operations:

- (a) removal of white space, line spacing data and/or tabbing data from the text of message
- (b) removal of punctuation from the text of the message
- (c) removal of font data and/or attribute data associated with the text of the message
- (d) removal of any graphics data from the message

-17-

- (e) replacement of paragraph formatting data from the text of the message with predefined format tags
- (f) replacement of recognized words in the message with pre-defined word abbreviations; and
- 5 (g) replacement of recognized words or phrases in the message with pre-defined binary phrase tags

At the end of the data formatting step, preferably the data compressor 220 compresses the formatted electronic data. The electronic data transmission system 200 then  
10 transmits the compressed formatted electronic data to the network terminal 300 over the wireless network 112, at step 410. Typically, the compressed formatted electronic data is transmitted as part of an encrypted data package which includes the network address of the network terminal 300 to provide a level of assurance that the electronic data is not accessible to operators of other network terminals 300.

15 Upon receipt of the data package, the data decompressor 322 of the wireless terminal 300 decrypts and decompresses the received electronic data package, at step 412, and extracts the decompressed formatted electronic data from the data package. Then, if the decompressed electronic data includes format tags, the data reformatter 324  
20 reformats the formatted electronic data using the format tags in the electronic data. If the formatted electronic data includes standard word abbreviations, the data reformatter 324 replaces the word abbreviations with their associated words. Further, if the formatted data also includes pre-defined binary phrase tags, at step 414 the data reformatter 324 queries the dictionary database 318 with the pre-defined binary phrase  
25 tags in order to replace the phrase tags included in the electronic data with their associated words or phrases. The data processing system 306 then displays the decompressed electronic data on the display device 310, at step 416.

30 If upon review of the electronic data, the operator concludes that the electronic data was insufficiently or excessively filtered by the electronic data transmission system 200, the operator can request a different level of data filtration at step 414 by transmitting a desired filtration parameter to the electronic data transmission system 200 and repeating steps 406 to 416 above.

As will be apparent from the foregoing discussion, since the electronic data transmission system 200 reduces the size of the electronic data prior to transmission to the network terminal 300 (via data formatting and/or compression), the network bandwidth required to transmit the data package is less than that of the prior art transmission systems. Further, since the operator of a network terminal 300 can recursively specify alternate data filtration parameters for the desired electronic data, the operator can tailor the level of filtration in accordance with the data resolution capabilities of the network terminal 300 and the contents/characteristics of the electronic data.

10

Thus far in the discussion, the process performed by the electronic data communication system 100 has focussed on its ability to transmit filtered/compressed electronic data to network terminals 300. However, the electronic data communication system 100 can also be used to transmit electronic data to network resources 104 upon command from the network terminals 300. This aspect of the invention will be described with reference to Fig. 5.

15

As shown therein, at step 500 the operator of the network terminal 300 selects a network resource 104 by transmitting to the electronic data transmission system 200 a request over the wireless network 112 for a list of available network resources 104. The network resource query may be based upon any desired criteria, including print turn-around time and page size (where the target network resource 104 is a printer), price, and geography. In addition, the operator may provide the electronic data transmission system 200 with the geographical coordinates of the wireless terminal 300 to determine the operator's nearest network resources. The operator may provide its geographical coordinates through any suitable mechanism known to those skilled in the art, including latitude/longitude co-ordinates, GPS, and wireless triangulation.

20

25

At step 502, the authorization processor 222 of the electronic data transmission system 200 transmits to the wireless terminal 300 a list of pseudo-names associated with each network resource 104 which satisfies the designated search criteria. If the operator logged in to the electronic data communication system 100, the authorization processor 222 generates the required list by querying the resource database 114 with the operator's username to identify the network resources 104 with which the operator

30

-19-

has been authorized to communicate. Accordingly, in this scenario the pseudo-name list will include both "public access" network resources 104 and "authorized access" network resources 104 with which the operator has been authorized to communicate. Also, if the user is member of an enterprise having network resources 104 registered with the electronic data communication system 100, the pseudo-name list will also identify network resources 104 which have been registered by the enterprise for "private access". Otherwise, the pseudo-name list will only identify network resources 104 registered for public access.

10 Upon receipt of the resource list, the operator selects a network resource 104 from the list. Then, at step 504, the operator of the network terminal 300 transmits a transmission request to the electronic data transmission system 200, specifying the pseudo-name of the selected network resource 104. The authorization processor 222 of the electronic data transmission system 200 queries the resource database 114 with  
15 the received pseudo-name for the resource record associated with the pseudo-name. The authorization processor 222 then extracts the user access level from the user access level field of the retrieved resource record, at step 506, and verifies that the network terminal 300 is still authorized to communicate with the selected network resource 104. As will be apparent from the foregoing discussion, if the user access  
20 level field specifies "public access" for the network resource 104, the network terminal 300 will be automatically authorized to communicate with the network resource 104.

However, if the user access level field specifies "private access" for the network resource 104, the authorization processor 222 determines the network address of the network terminal 300 from the transmission request transmitted by the network terminal 300, and then queries the user access level sub-field with the terminal's network address to determine whether the network terminal 300 is still authorized to communicate with the network resource 104. On the other hand, if the user access  
25 level field specifies "authorized access" for the network resource 104, the authorization processor 222 queries the user access level sub-field with the operator's username to determine whether the network terminal 300 is still authorized to communicate with the network resource 104.  
30

-20-

If the query at step 506 reveals that the network terminal 300 is no longer authorized to communicate with the network resource 104, at step 508 the authorization processor 222 provides the network terminal 300 with a notification that the network terminal 300 is not authorized for communication with the selected resource 104. However, if  
5 the query at step 506 reveals that the network terminal 300 is still authorized to communicate with the network resource 104, the authorization processor 222 queries the network address field of the resource record associated with the network resource 104 for the network address of the network resource 104. The authorization processor 222 then transmits the original unfiltered uncompressed electronic data to the network  
10 resource 104 at the specified network address, at step 510.

Typically, the network resource 104 will comprise a land-based network resource, accordingly the authorization processor 222 will transmit the unfiltered uncompressed electronic data to the network resource 104 over the land-based communications  
15 network 108. As will be apparent, this mechanism of transmitting electronic data to land-based network resources 104 is advantageous since it allows the original electronic data to be transmitted to the network resource 104 without requiring significant wireless network bandwidth. However, the network resource 104 may also comprise a wireless-based network resource. Although transmission of the original  
20 unfiltered uncompressed electronic data to the network resource 104 would increase the wireless bandwidth requirements of the electronic data communication system 100, the transmission of the electronic data to the network resource 104 would not be hindered by the processing power limitations of the network terminal 300.

25 The foregoing description is intended to be illustrative of the preferred embodiment of the present invention. Those of ordinary skill may envisage certain additions, deletions and/or modifications to the described embodiment which, although not explicitly described herein, are encompassed by the spirit or scope of the invention, as defined by the claims appended hereto.

**WE CLAIM:**

1. An electronic data transmission system comprising:  
a data receiver for receiving a request for transmission of electronic data to a network terminal over a communications network, the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data;  
a data processing system in communication with the data receiver for formatting the electronic data in accordance with the at least one data filtration parameter; and  
a data transmitter in communication with the data processing system for transmitting the formatted data to the network terminal over the communications network.
2. The electronic data transmission system according to claim 1, wherein the electronic data comprises at least one word having an associated phrase tag, and the data processing system is configured to replace each said at least one word with the associated phrase tag.
3. The electronic data transmission system according to claim 1 or 2, the electronic data comprises at least one word having an associated abbreviation, and the data processing system is configured to replace each said word with the associated abbreviation.
4. The electronic data transmission system according to any of claims 1 to 3, wherein the electronic data comprises text data, and the data processing system is configured to remove from the electronic data at least one of font data and attribute data associated with the text data.
5. The electronic data transmission system according to any of claims 1 to 4, wherein the electronic data comprises text data, the text data having formatting data associated therewith, and the data processing system is configured to replace the formatting data with predefined format tags to reduce a byte length of the electronic data.
6. The electronic data transmission system according to any of claims 1 to 5, wherein the electronic data includes graphics data, and the data processing system is configured to remove the graphics data from the electronic data.

7. The electronic data transmission system according to any of claims 1 to 6, wherein the data receiver is configured to receive a request for retransmission of the transmitted electronic data between the network terminal and a network resource, and the data processing system is configured to determine an authorization for the retransmission in accordance with an access level defined for the network resource.
8. The electronic data transmission system according to claim 7, wherein the data processing system is in communication with a resource registry for identifying the user access level for the network resource.
9. The electronic data transmission system according to claim 8, wherein the network resource has a network address, the retransmission request includes an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address, and the data processing system is configured to determine the authorization from the pseudo-name.
10. A method of electronic data transmission, comprising the steps of:
  - receiving a request for transmission of electronic data over a communications network to a network terminal, the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data;
  - formatting the electronic data in accordance with the at least one data filtration parameter; and
  - transmitting the formatted data to the network terminal over the communications network.
11. The method according to claim 10, wherein the electronic data comprises at least one word having an associated phrase tag, and the formatting step comprises replacing each said at least one word with the associated phrase tag.
12. The method according to claim 10 or 11, wherein the electronic data comprises at least one word having an associated abbreviation, and the formatting step comprises replacing each said word with the associated abbreviation.



13. The method according to any of claims 10 to 12, wherein the electronic data comprises text data, and the formatting step comprises removing from the electronic data at least one of font data and attribute data associated with the text data.
14. The method according to any of claims 10 to 13, wherein the electronic data comprises text data, the text data having formatting data associated therewith, and the formatting step comprises replacing the formatting data with predefined format tags to reduce a byte length of the electronic data.
15. The method according to any of claims 10 to 14, wherein the electronic data includes graphics data, and the formatting step comprises removing the graphics data from the electronic data.
16. The method according to claim 10, further comprising the steps of:
  - receiving a request for transmission of the extracted electronic data between the network terminal and a network resource; and
  - determining an authorization for communication with the network resource in accordance with an access level defined for the network resource.
17. The method according to claim 16, wherein the network resource has a network address, the data server is in communication with a resource registry for identifying a user access level for the network resource, and the authorization determining step comprises querying the resource registry with the network address.
18. The method according to claim 16, wherein the network resource has a network address, and the transmission request includes an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address.
19. An electronic data terminal comprising:
  - a data receiver for receiving over a communications network a data package from a data server;
  - a data processing system in communication with the data receiver for extracting electronic data from the data package; and

a data transmitter in communication with the data processing system for providing the data server with a request for retransmission of the electronic data, the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

20. The electronic data terminal according to claim 19, wherein the electronic data comprises at least one phrase tag having an associated at least one word, and the data processing system includes a dictionary for replacing each said phrase tag with the associated at least one word.

21. The electronic data terminal according to claim 19 or 20, wherein the electronic data comprises at least one abbreviation having an associated word, and the data processing system is configured to replace each said abbreviation with the associated word.

22. The electronic data terminal according to any of claims 19 to 21, wherein the electronic data comprises at least one format tag having associated formatting data, and the data processing system is configured to replace each said format tag with the associated formatting data.

23. A method of electronic data transmission, comprising the steps of:  
receiving over a communications network a data package from a data server;  
extracting electronic data from the data package; and  
in accordance with a resolution of the extracted electronic data providing the data server with a request for retransmission of the electronic data, the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

24. The method according to claim 23, wherein the electronic data comprises at least one phrase tag having an associated at least one word, and the extracting step comprises replacing each said phrase tag with the associated at least one word.

25. The method according to claim 23 or 24, wherein the electronic data comprises at least one abbreviation having an associated word, and the extracting step comprises replacing each said abbreviation with the associated word.

26. The method according to any of claims 23 to 25, wherein the electronic data comprises at least one format tag having associated formatting data, and the extracting step comprises replacing each said format tag with the associated formatting data.

27. The method according to claim 23, further comprising the step of transmitting to the data sever a request for transmission of the extracted electronic data to a network resource, the network resource having a network address, the transmission request including an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address.

---

**This Page Blank (uspto)**

IC07 Rec'd PCT/PTO 09 NOV 200

09/926474

The PTO did not receive the following  
listed item(s)

No Postcard

This Page Blank (uspto)

---

**This Page Blank (uspto)**

# PATENT COOPERATION TREATY

## PCT

REC'D 29 OCT 2002

WIPO PCT

### INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference T8-465681WO		<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/CA01/00303	International filing date (day/month/year) 13/03/2001	Priority date (day/month/year) 13/03/2000
International Patent Classification (IPC) or national classification and IPC H04L12/28		
Applicant SPICER CORPORATION et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 6 sheets, including this cover sheet.

☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 5 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 02/10/2001	Date of completion of this report 25.10.2002
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer  Poggio, F  Telephone No. +49 89 2399 7958 

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/CA01/00303

## I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

### Description, pages:

1-20 as originally filed

### Claims, No.:

1-27 with telefax of 10/10/2002

### Drawings, sheets:

1/5-5/5 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:



# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/CA01/00303

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

Novelty (N)	Yes:	Claims	1-27
	No:	Claims	
Inventive step (IS)	Yes:	Claims	
	No:	Claims	1-27
Industrial applicability (IA)	Yes:	Claims	1-27
	No:	Claims	

### 2. Citations and explanations see separate sheet

**Re Item V**

**Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1 The following documents are cited:

- D1: LILJEBERG M ET AL: 'Enhanced Services for World-Wide Web in Mobile WAN Environment' 1 April 1996 (1996-04-01) , UNIVERSITY OF HELSINKI, DEPARTMENT OF COMPUTER SCIENCE, PUBLICATION N C-1996-28 , HELSINKI, FINLAND XP002162553
- D2: WO 00 11850 A (GEOWORKS CORP.) 2 March 2000 (2000-03-02)
- D3: US-A-5 958 006 (EGGLESTON ET AL.) 28 September 1999 (1999-09-28)
- D4: ZENEL B ET AL: 'Intelligent communication filtering for limited bandwidth environments' WORKSHOP ON HOT TOPICS IN OPERATING SYSTEMS, XX, XX, 4 May 1995 (1995-05-04), pages 28-34, XP002094011
- D5: WO 98 36344 A (LEXTRON SYSTEMS INC.) 20 August 1998 (1998-08-20)
- D6: US-A-5 764 235 (HUNT ET AL.) 9 June 1998 (1998-06-09)
- D7: WO 99 65256 A (LOGICA INC.) 16 December 1999 (1999-12-16)

The document D7 was not cited in the international search report. A copy of the document is appended hereto.

2 **Independent claim 1**

Document D3 (see in particular the passages cited in the International Search Report) discloses according to the essential features of claim 1 an electronic data transmission server (cf fig.2) comprising:

a data receiver for receiving a request for transmission of an e-mail attachment to a network terminal over a communications network (**e.g. a switch or a generical intermediate unit - cf col. 5 lines 4-15**), the e-mail attachment including content and data defining the presentation of the content (cf col. 8 lines 18-30, but it could also be a ".jpg" or ".pps" defining the format of the attachment);

a data processing system in communication with the data receiver for converting the e-mail attachment into a less memory-intensive data format ("**communication server**" in D3 cf fig. 2 (220) and col. 5 lines 42-67), the data processing system

being configured to perform the conversion by extracting basic information from the e-mail (cf col. 8 line 31-col. 9 line 2); and  
a data transmitter in communication with the data processing system (**e.g. a base station, cf fig 2 (218), (219) and col 6 lines 1-9**) for transmitting the extracted information to the network terminal over the communication network (cf. col 10 lines 1-32, i.e. a summary is forwarded to the recipient).

The only minor difference between the features of claim 1 and the disclosure of document D3 is the kind of information extracted from the e-mail.

In consulting the prior art the men skilled in the art would come across document D7, which discloses an obvious way to implement the system for extracting the content from an e-mail (cf page 5 line 25 to page 6 line 4), in particular, **in case of attached file, the content, corresponding to the name of the attachment, is extracted and sent to the recipient (cf page 22 lines 27 and 28). The name of the attachment is a less memory-intensive format that represents the content of the attachment.**

**NB : No definition is given for "presentation data", which can be interpreted as format of the e-mail or whatever other attribute of the message.  
And anyway it is not clear what inventive contribution would be made to the art by the feature of not transmitting any presentation data to the recipient.**

Therefore the subject matter of claim 1 does not involve an inventive step so that this claim does not comply with the dispositions set out in Articles 33 (1), (3) PCT.

### **3 Independent claim 8**

Independent method claim 8 relates, in terms of method steps, to the same electronic data transmission server disclosed in apparatus claim 1; these features, as stated in section 2 of the present Written Opinion, are already known from document D3 or directly derivable from any other prior art document.

The same considerations outlined with respect to claim 1 are thus also valid for independent claim 8.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/CA01/00303

The subject-matter of independent claim 8 therefore does not involve an inventive step, so that the claim does not comply with the dispositions set out in Articles 33 (1), (3) PCT.

**4 Dependent claims 2 to 7 and 9 to 14**

Dependent claims 2 to 7 and 9 to 14 do not appear to contain any additional features which in combination with the features of any claim to which they refer, involve an inventive step for the following reasons: these features are either directly derivable from prior art documents D1-D7 or represent minor design details generally known in the field of data communication networks.

The subject-matter of dependent claims 2 to 7 and 9 to 14 therefore does not involve an inventive step so that these claims do not comply with the dispositions set out in Articles 33 (1) and (3) PCT.

**5 Certain observations on the international application (clarity)**

The two definitions of the invention given in the independent device claims 1 and 15 or in the independent method claims 8 and 20 are such that the claims as a whole are not clear and concise, contrary to Article 6 PCT; the application contains, in fact two device claims and two method claims of overlapping scope.

The subject-matter set out in these claims relates to embodiments having the same essential technical features and differing only in minor details.

The same considerations about novelty and inventive step outlined with respect to claim 1 and 8 are thus also valid for claims 15 and 20 and consequently for related dependent claims (cf sections 2, 3 and 4 of the present Written Opinion).

Therefore the whole set of claims should have been recast and renumbered consecutively to include only one independent claim for each category, with dependent claims as appropriate (Rule 6.4 (a) - (c) PCT).

-21-

**WE CLAIM:**

1. An electronic data transmission server comprising:
  - a data receiver for receiving a request for transmission of an e-mail attachment to a network terminal over a communications network, the e-mail attachment including content and data defining the presentation of the content;
  - a data processing system in communication with the data receiver for converting the e-mail attachment into a less memory-intensive data format, the data processing system being configured to perform the conversion by extracting the content from the e-mail attachment without the presentation data; and
  - a data transmitter in communication with the data processing system for transmitting the extracted content to the network terminal over the communications network without the presentation data.
2. The electronic data transmission system according to claim 1, wherein the e-mail attachment comprises at least one word having an associated phrase tag, and the data processing system is configured to perform the conversion by replacing each said at least one word with the associated phrase tag.
3. The electronic data transmission system according to claim 1, wherein the e-mail attachment comprises at least one word having an associated abbreviation, and the data processing system is configured to perform the conversion by replacing each said word with the associated abbreviation.
4. The electronic data transmission system according to any of claims 1 to 3, wherein the e-mail attachment includes at least one of text font data and text attribute data, and the data processing system is configured to perform the conversion by extracting the content without the at least one font data and attribute data.
5. The electronic data transmission system according to any of claims 1 to 4, wherein the e-mail attachment includes text formatting data, and the data processing system is configured to

-22-

perform the conversion by replacing the formatting data with predefined format tags to reduce a byte length of the content.

6. The electronic data transmission system according to any of claims 1 to 5, wherein the e-mail attachment includes raster image data, and the data processing system is configured to perform the conversion by converting the image data to text.

7. The electronic data transmission system according to any of claims 1 to 6, wherein the e-mail attachment includes graphics data, and the data processing system is configured to perform the conversion by modifying a resolution of the graphics data.

8. A method of electronic data transmission, comprising the steps of:

receiving a request for transmission of an e-mail attachment over a communications network to a network terminal, the e-mail attachment including content and data defining the presentation of the content;

converting the e-mail attachment into a less memory-intensive data format, the converting step comprising extracting the content from the e-mail attachment without the presentation data; and

transmitting the extracted content to the network terminal over the communications network without the presentation data.

9. The method according to claim 8, wherein the e-mail attachment comprises at least one word having an associated phrase tag, and the converting step comprises replacing each said at least one word with the associated phrase tag.

10. The method according to claim 8, wherein the e-mail attachment comprises at least one word having an associated abbreviation, and the converting step comprises replacing each said word with the associated abbreviation.

11. The method according to any of claims 8 to 10, wherein the e-mail attachment includes at least one of text font data and text attribute data, and the converting step comprises extracting the content without the at least one font data and attribute data.

-23-

12. The method according to any of claims 8 to 11, wherein the e-mail attachment includes text formatting data, and the converting step comprises replacing the formatting data with predefined format tags to reduce a byte length of the content.
13. The method according to any of claims 8 to 12, wherein the e-mail attachment includes raster image data, and the converting step comprises converting the image data to text.
14. The method according to any of claims 8 to 13, wherein the e-mail attachment includes graphics data, and the converting step comprises modifying a resolution of the graphics data.
15. An electronic data transmission server for directing an e-mail attachment to a network resource, the e-mail attachment including content and data defining the presentation of the content, the data transmission server comprising:
  - a data processing system configured for extracting the content from the e-mail attachment without the presentation data;
  - a data receiver in communication with the data processing system for receiving from a network terminal a request for transmission of at least the attachment content to the network resource; and
  - a data transmitter in communication with the data processing system for transmitting to a network terminal over a communications network the extracted content without the presentation data, the data processor being further configured for initiating transmission of the at least attachment content to the network resource in accordance with the network resource transmission request and an access level defined for the network resource.
16. The data transmission server according to claim 15, wherein the network resource has a network address, the network resource transmission request includes an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address, and the data processing system is configured to determine the access level by querying a resource registry with the pseudo-name.
17. The data transmission server according to claim 15 or 16, wherein the e-mail attachment comprises at least one word having an associated phrase tag, and the data processing system is

-24-

configured to perform the extraction by replacing each said at least one word with the associated phrase tag.

18. The data transmission server according to claim 15 or 16, wherein the e-mail attachment comprises at least one word having an associated abbreviation, and the data processing system is configured to perform the extraction by replacing each said at least one word with the associated abbreviation.

19. The data transmission server according to any of claims 15 to 18, wherein the e-mail attachment comprises text formatting data, and the data processing system is configured to perform the extraction by replacing the formatting data with predefined format tags to reduce a byte length of the content.

20. A method of directing an e-mail attachment to a network resource, the e-mail attachment including content and data defining the presentation of the content, the method comprising the steps of:

extracting the attachment content from the e-mail attachment without the presentation data and transmitting to a network terminal over a communications network the extracted content without the presentation data;

receiving from the network terminal a request for transmission of at least the attachment content to the network resource; and

initiating transmission of the at least content to the network resource in accordance with an access level defined for the network resource.

21. The method according to claim 20, wherein the network resource has a network address, the network resource transmission request includes an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address, and the network resource transmitting step comprises querying a resource registry with the pseudo-name for the access level.



-25-

22. The method according to claim 20 or 21, wherein the e-mail attachment comprises at least one word having an associated phrase tag, and the converting step comprises replacing each said at least one word with the associated phrase tag.

23. The method according to any of claims 20 to 22, wherein the e-mail attachment comprises at least one word having an associated abbreviation, and the converting step comprises replacing each said word with the associated abbreviation.

24. The method according to any of claims 20 to 23, wherein the e-mail attachment includes at least one of text font data and text attribute data, and the extracting step comprises extracting the content without the at least one font data and attribute data.

25. The method according to any of claims 20 to 24, wherein the e-mail attachment includes text formatting data, and the extracting step comprises replacing the formatting data with predefined format tags to reduce a byte length of the content.

26. The method according to any of claims 20 to 25, wherein the e-mail attachment includes raster image data, and the extracting step comprises converting the image data to text.

27. The method according to any of claims 20 to 26, wherein the e-mail attachment includes graphics data, and the extracting step comprises modifying a resolution of the graphics data.

This Page Blank (uspto)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number  
**WO 01/69855 A2**

(51) International Patent Classification<sup>7</sup>: **H04L 12/28,**  
29/06

(21) International Application Number: **PCT/CA01/00303**

(22) International Filing Date: **13 March 2001 (13.03.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
2,301,996 **13 March 2000 (13.03.2000) CA**

(71) Applicant (for all designated States except US): **SPICER CORPORATION [CA/CA]; 221 McIntyre Drive, Kitchener, Ontario N2R 1G1 (CA).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SPICER, Steven [CA/CA]; 119 Champlain Crescent, Kitchener, Ontario N2B 2Y7 (CA). MARTIN, Christopher [CA/CA]; 66 Mooregate Crescent, Apt. 1304, Kitchener, Ontario N2M 5E6 (CA). PIDDUCK, Patrick [CA/CA]; 267 Castlefield Avenue, Waterloo, Ontario N2K 2M4 (CA). LEHAN, Tim**

[CA/CA]; 168 Samuel Street, Kitchener, Ontario N2H 1R1 (CA). **PEREIRA, Kathy [CA/CA]; 255 Newpört Place, Waterloo, Ontario N2T 1T9 (CA).**

(74) Agents: **GRAHAM, Robert, J. et al.;** Gowling Lafleur Henderson LLP, Suite 4900, Commerce Court West, Toronto, Ontario M5L 1J3 (CA).

(81) Designated States (national): **AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CO, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.**


(84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: **LIMITED-BANDWIDTH ELECTRONIC DATA COMMUNICATION SYSTEM**

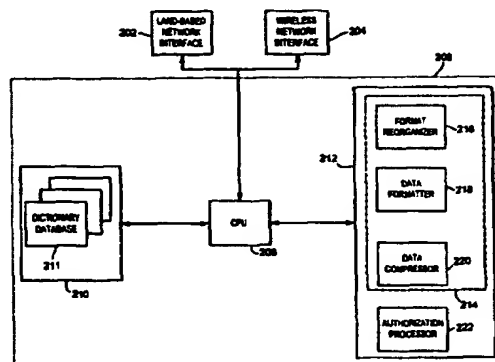

(57) Abstract: A limited-bandwidth network electronic data communication system includes an electronic data transmission system and a network terminal in communication with the electronic data transmission system over a communications network. The electronic data transmission system includes a data receiver, a data formatter and a data transmitter. The electronic data terminal includes a data receiver, a data reformatter and a data transmitter. Using the data transmitter an operator of the electronic data terminal transmits a request for transmission of an electronic message from the electronic data transmission system to the electronic data terminal. Upon receipt of the transmission request, the data formatter of the electronic data transmission system formats the electronic message in accordance with a default filtration parameter associated with the electronic data terminal, and assembles the electronic message as part of an electronic data package. Alternately, the retransmission request may include at least one data filtration parameter defining a desired alternate resolution for the electronic message, in which case the data formatter of the electronic data transmission system formats the electronic message in accordance with the specified filtration parameter. When the formatting step is completed, the data transmitter of the electronic data transmission system transmits the electronic data package to the electronic data terminal. Upon receipt of the electronic data package, the data reformatter of the electronic data terminal extracts the electronic message from the data package for review by the operator of the electronic data terminal.

WO 01/69855 A2

This Page Blank (uspto)



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

This Page Blank (uspto)

**LIMITED-BANDWIDTH  
ELECTRONIC DATA COMMUNICATION SYSTEM**

**FIELD OF THE INVENTION**

- 5     The present invention relates to a method and system for data communication over a network. In particular, the present invention relates to a method and system for transmitting electronic messages over a limited bandwidth network, such as a wireless network.

10    **BACKGROUND OF THE INVENTION**

- Wireless communications devices, such as e-mail pagers, wireless telephones and personal data assistants, have become increasingly popular due to their ability to provide users with electronic messaging capabilities outside the confines of the office workplace. To enhance the portability and battery life of such devices, the typical  
15    wireless communications device includes a low powered microprocessor, limited memory resources, and a low resolution display. However, notwithstanding the popularity of these devices, the conventional wireless communications device is deficient in a number of respects.

- 20    First, given the limited computational capabilities of these devices, it is often difficult to receive and process messages having dense or complex informational content, such as messages which include images, sound effects and/or complex textual formatting. This problem is compounded by limitations in wireless bandwidth.

- 25    Second, often an originator of an e-mail message will attach a non-MIME-based document to the MIME-based section of the message. For example, the originator of the e-mail message might attach a document created with word processor software, spreadsheet software or graphics presentation software. Given that each document type can have any of variety of different file formats, it often difficult, if not  
30    impossible, to view the content of document attachments on the conventional wireless communications device given the limited computational capabilities of these devices.

Third, the computational and display resolution capabilities of these devices can vary considerably from manufacturer to manufacturer. Consequently, an electronic

This Page Blank (uspto)



message configured for reception and review on one wireless communications device may not be accurately displayed on another wireless communications device.

- 5 Fourth, users of wireless communications devices typically must pay their respective wireless service provider for the wireless service in accordance with the volume of data received with their device. Since the user of the wireless communications device cannot preview the electronic message prior to receipt on their device, the cost associated with the ownership of these devices can be prohibitive.
- 10 Therefore, there remains a need for an electronic data communication system for message transmission to wireless communications devices which recognizes the computational power and bandwidth limitations associated with these devices, the varied computational and display capabilities of these devices, the variety of available electronic message formats, and the costs associated with ownership and operation of
- 15 these devices.

#### SUMMARY OF THE INVENTION

- According to a first aspect of the present invention, there is provided an electronic transmission system and a method of electronic data transmission which addresses at
- 20 least one deficiency of the conventional electronic message communication system.

- According to a second aspect of the present invention, there is provided an electronic data terminal and a method of electronic data transmission which addresses which addresses at least one deficiency of the conventional electronic message transmission
- 25 system.

- The electronic data transmission system, according to the first aspect of the present invention, includes a data receiver, a data formatter and a data transmitter. The data receiver is configured to receive a request for transmission of electronic data to a
- 30 network terminal over a communications network, with the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data. The data formatter is in communication with the data receiver for formatting the electronic data in accordance with the data filtration parameter. The

**This Page Blank (uspto)**

data transmitter is in communication with the data formatter for transmitting the formatted data to the network terminal over the communications network.

5 The method of electronic data transmission, according to the first aspect of the present invention, includes the steps of (1) receiving a request for transmission of electronic data over a communications network to a network terminal, the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data; (2) formatting the electronic data in accordance with the data filtration parameter; and (3) transmitting the formatted data to the network terminal over the  
10 communications network.

The electronic data terminal, according to the second aspect of the present invention, includes a data receiver, a data reformatter and a data transmitter. The data receiver is configured to receive over a communications network a data package from a data  
15 server. The data reformatter is in communication with the data receiver for extracting electronic data from the data package. The data transmitter is in communication with the data formatter for providing the data server with a request for retransmission of the electronic data, with the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

20 The method of electronic data transmission, according to the second aspect of the present invention, includes the steps of (1) receiving over a communications network a data package from a data server; (2) extracting electronic data from the data package; and (3) in accordance with a resolution of the extracted electronic data  
25 providing the data server with a request for retransmission of the electronic data, the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

30 In accordance with one implementation of the invention, using the data transmitter an operator of an electronic data terminal transmits a request for transmission of an electronic message from the electronic data transmission system to the electronic data terminal. Upon receipt of the transmission request, the data formatter of the electronic data transmission system formats the electronic message in accordance with a default filtration parameter associated with the electronic data terminal, and assembles the

**This Page Blank (uspto)**

electronic message as part of an electronic data package. Alternately, the retransmission request may include at least one data filtration parameter defining a desired alternate resolution for the electronic message, in which case the data formatter of the electronic data transmission system formats the electronic message in accordance with the specified filtration parameter. Typical filtration parameters may require replacement of particular words with recognized abbreviations, removal of font and attribute data, replacement of formatting data with format tags to reduce a byte length of the electronic data, and/or removal of graphics data from the electronic data.

10

When the formatting step is completed, the data transmitter of the electronic data transmission system transmits the electronic data package to the electronic data terminal. Upon receipt of the electronic data package, the data reformatter of the electronic data terminal extracts the electronic message from the data package for review by the operator of the electronic data terminal. If the operator of the electronic data terminal concludes that the resolution of the extracted electronic message is unsatisfactory, the operator can transmit a request to the electronic data transmission system for retransmission of the electronic message. The retransmission request includes at least one data filtration parameter defining the desired alternate resolution for the electronic message.

20

Alternately, if the operator desires that the electronic message be transmitted to a network resource, such as a network printer, the operator transmits a request to the electronic data transmitter for retransmission of the electronic message. Upon receipt of the retransmission request, the electronic data transmission system queries a central resource registry to identify a user access level for the specified network resource, and then determines from the access level defined for the network resource whether the electronic data terminal is authorized for communication with the specified network resource. The electronic data transmission system then transmits the original unfiltered electronic message to the network resource in accordance with the determined authorization.

30

#### BRIEF DESCRIPTION OF THE DRAWINGS

**This Page Blank (uspto)**

The present invention will now be described, by way of example only, with reference to the drawings, in which:

Fig. 1 is a schematic view of a limited-bandwidth electronic data communication system, showing the electronic data transmission system and the network terminals according to the present invention;

Fig. 2 is a schematic view of the electronic data transmission system depicted in Fig. 1, showing the data receiver, the data formatter and the data transmitter of the electronic data transmission system;

Fig. 3 is a schematic view of one of the network terminals depicted in Fig. 1, showing the data receiver, the data reformatter and the data transmitter of the data terminal;

Fig. 4 is a flow chart depicting the method of transmitting electronic data between the electronic data transmission system and one of the network terminals; and

Fig. 5 is a flow chart depicting the method of transmitting the electronic data between one of the network terminals and a network resource via the electronic data transmission system.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

Turning to Fig. 1, a limited-bandwidth electronic data communication system, denoted generally as 100, is shown comprising an electronic data server 102, a network resource 104, a resource registry 106, an electronic data transmission system 200 in communication with the electronic data server 102, and a network terminal 300. Typically, the electronic data communication system 100 includes a plurality of the electronic data servers 102, a plurality of the network resources 106, a plurality of the electronic data transmission systems 200, and a plurality of the network terminals 300, however for enhanced clarity of discussion, Fig. 1 only shows a single electronic data server 102, a single network resource 104, a single electronic data transmission system 200, and a single network terminal 300. Further, any of the network resources 104 and the network terminals 300 may comprise either land-based communications devices or wireless communications devices.

This Page Blank (uspto)



The electronic data communication system 100 also includes a land-based communications network 108 for facilitating communication between the electronic data server 102, land-based versions of the network resources 104, the resource registry 106, the electronic data transmission system 200, and land-based versions of the network terminals 300. Preferably, the electronic data server 102 is accessible to the electronic data transmission system 200 over a secure communication channel 110 established between the electronic data server 102 and the electronic data transmission system 200, however the electronic data server 102 may also be accessible to the electronic data transmission system 200 over the land-based communications network 108. In addition to the land-based communications network 108, preferably the electronic data communication system 100 includes a wireless communications network 112 for facilitating communication between wireless versions of the network resources 104, the electronic data transmission system 200, and wireless versions of the network terminals 300. However, it should be understood that the electronic data communication system 100 is not limited to the foregoing network configuration, but instead may comprise a single land-based network or a single wireless network, as the requirements of the network resources 104 and the network terminals 300 dictate.

Preferably, the land-based communications network 108 comprises the Internet, and the electronic data servers 102 comprise land-based network-enabled POP3 e-mail servers for receiving and storing electronic mail messages received from remote SMTP e-mail servers over the Internet. However, the electronic data servers 102 need not be e-mail servers, but instead may comprise any computer server which is configured to transmit electronic data to one of the electronic data transmission systems 200. For instance, any of the electronic data servers 102 may comprise a music file server, an image file server, a multimedia file server, a File Transfer Protocol (FTP) server, or even a Hyper-Text Markup Language (HTML) World Wide Web server.

Typically, each network resource 104 comprises a printing device, and in particular, an IPP-compliant printer. However, the network resources 104 need not only be networked printers (IPP-compliant or otherwise), but instead may comprise any of a variety of data communication devices, including facsimile machines, image servers and file servers. Further, as discussed above, the electronic data communication



---

**This Page Blank (uspto)**

system 100 is not limited for use with land-based data communications devices, but instead can be used to provide access to wireless communications devices. For instance, any of the network resources 104 may comprise e-mail pagers or e-mail enabled wireless telephones. Typically, the network resources 104 are directly accessible over the respective communications network 108, 112. For instance, one of the network resources 104 may comprises an IPP-capable printer or facsimile machine. However, in one variation, at least one of the network resources 104 is not directly accessible over the respective communications network 108, 112, but instead is indirectly accessible over the communications network 108, 112 via a suitable server.

The resource registry 106 comprises a computer server configured for interfacing with the communications network 108, and includes a resource database 114 and a user registration database 116. The resource database 114 includes resource records identifying parameters associated with the network resources 104. Preferably, each resource record includes a network address field, a resource type field, and a user access level field for the associated network resource 104.

The network address field identifies the network address of the network resource 104. If the network resource 104 is directly accessible over the communications network 108, the network address field identifies the network address of the network resource 104. However, if the network resource 104 is not directly accessible over the communications network 108, but instead is linked to the communications network 108 via a suitable server, the network address field identifies the network address of the server associated with the network resource 104.

The resource type field identifies the type of data communication device of the network resource 104. For instance, the resource type field may specify that the network resource 104 is a printer, a plotter, a facsimile machine, an image server or a file server. Further, the resource type field may include a resource type sub-field specifying a sub-class of the network resource type. For example, the resource type sub-field may specify that the network resource is an IPP-capable printer or facsimile machine, or a non-IPP-capable printer or facsimile machine.



---

**This Page Blank (uspto)**

The user access level field identifies the type of communications access which the network terminals 300 are allowed to have in regards to the associated network resource 104. In the embodiment, as presently envisaged, the user access level field establishes that the network resource 104 allows one of:

5

- (a) "public access" in which any network terminal 300 of the electronic data communication system 100 can communicate with the network resource 104;
- (b) "private access" in which only members (eg. employees) of the enterprise associated with the network resource 104 can communicate with the network resource 104; and
- (c) "authorized access" in which only particular network terminals 300 can communicate with the network resource 104.

10

15 If the user access level field specifies "authorized access" for a network resource 104, preferably the user access level field includes a sub-field which lists the network addresses of the network terminals 300 authorized to access the network resource 104, and a sub-field which includes an authorization password which the identified network terminals 300 must provide in order to access the network resource 104. If

20 the user access level field specifies "private access" for a network resource 104, preferably the user access level field includes a sub-field which lists the network addresses of the network terminals 300 which are deemed to members of the enterprise.

20

25 It should be understood, however, that the user access level field is not limited to identifying only the foregoing predefined user access levels, but may instead identify more than one of the predefined user access levels, or other user access levels altogether. For instance, the user access level field may identify that the associated network resource 104 allows both private access to all employees of the enterprise responsible for operation of the network resource 104, and authorized access to other

30 pre-identified network terminals 300. Further, the user access level field may also include one or more sub-fields which provide additional restrictions/permissions on the type of communications access which the network terminals 300 are allowed to have in regards to the associated network resource 104. For instance, the user access

30



---

This Page Blank (uspto)

level sub-fields may limit the hours of operation of the network resource 104, or may place restrictions on the type of access limitations on a per-user basis, or per-group basis. Other variations on the type of access will be readily apparent, and are intended to be encompassed by the scope of the present invention.

5

Preferably, each resource record also includes an information field which provides additional information on the network resource 104, such as data handling capabilities, resource pricing and geographical co-ordinates. This latter parameter is particularly advantageous for use with mobile network terminals 300, such as a  
10 wireless-enabled personal data assistant or an e-mail-enabled wireless telephone, since it allows the network terminal 300 to identify the nearest one of a plurality of available network resources 104. In addition, each resource record includes a pseudo-name field, and a username/password field. The pseudo-name field contains a resource pseudo-name which identifies the network resource 104 to the network  
15 terminals 300. Preferably, the pseudo-name is a network alias that identifies the physical location and properties of the network resource 104, but does not identify the network address of the resource 104. The username/password field contains a unique username and password combination uniquely associated with the administrator of the associated network resource 104.

20

The user registration database 116 of the resource registry 106 includes user records each uniquely associated with an operator of a respective network terminal 300. Preferably, each user record identifies the registered user's name, post office address and/or e-mail address, and a default filtration parameter (discussed below) for the  
25 transmission of electronic data to the operator's wireless terminal 300. In addition, each user record specifies a password uniquely associated with the operator which the operator must specify in order to receive secure electronic data from the data server 102, and to update the operator's user record and to obtain access to network resources 104 configured for "authorized access".

30

The resource registry 106 is configured to provide administrators of the network resources 104 with controlled access to the records of the resource database 114 to allow the administrators to update the network address field, the resource type field, the user access level field, the resource information field, the pseudo-name field, and



---

This Page Blank (uspto)



the username/password field of the resource record for the associated network resource 104. This mechanism allows network administrators to change, for example, the network address and/or the restrictions/permissions of the network resources 104 under their control, or even the network resource 104 itself, without having to notify each network terminal 300 of the change. The resource registry 106 is also configured to provide controlled access to the records of the user registration database 116 so that only the operator of the network terminal 300 which established the user record can update the user record.

As shown in Fig. 2, each electronic data transmission system 200 is provided as a network-enabled computer server and comprises a land-based network interface 202 for interfacing with the land-based communications network 108, a wireless network interface 204 for interfacing with the wireless network 112, and a data processing system 206 in communication with the land-based network interface 202 and the wireless network interface 204. Typically, the land-based network interface 202 comprises an Ethernet network circuit card and the wireless network interface 204 comprises an RF antenna, however the electronic data transmitter 200 need not include both a land-based network interface 202 and a wireless network interface 204 but instead could be limited to only a land-based network interface 202 or a wireless network interface 204 as dictated by the network configuration.

The wireless network interface 204 typically is configured as a data receiver for receiving a transmission request for transmission of electronic data over the wireless communications network 112 to one of the network terminals 300. The land-based network interface 202 typically is configured to transmit the transmission request to the data server 102 over the land-based communications network 108, and to receive the requested electronic data from the data server 102. Typically, the electronic data comprises an e-mail message having an attachment document, however the electronic data can comprise other data forms, as discussed above, such as an HTML e-mail message, an electronic sound/music file, an electronic image file or an HTML document.

The data processing system 206 includes a central processing unit (CPU) 208, and a non-volatile memory storage device (DISC) 210 (such as a magnetic disc memory or



---

This Page Blank (uspto)

electronic memory) and a read/write memory (RAM) 212 both in communication with the CPU 208. Preferably, the DISC 210 includes a dictionary database 211 which includes a table of recognized words or phrases and associated pre-defined binary phrase tags. As will be explained, the data processing system 206 uses the dictionary database 211 to convert pre-established words and/or phrases into binary phrase tags in order to reduce the byte size of the electronic data transmitted to the network terminal 300..

The DISC 210 also includes data which, when loaded into the RAM 212, comprise processor instructions for the CPU 208. The processor instructions establish in the RAM 212 one or more memory objects defining a data format processor 214 and an authorization processor 222 in communication with the network interfaces 202, 204. Typically, the data format processor 214 comprises a format reorganizer 216, a data formatter 218, and a data compressor 220.

The format reorganizer 216 is configured to convert the received electronic data from the original format to a less memory-intensive format. For instance, if the electronic data comprises the attachment to an e-mail message, and the attachment comprises an electronic spreadsheet data file, the format reorganizer 216 would calculate the values of each cell of the spreadsheet and output the resulting numbers. Consequently the number of bytes occupied by the electronic data would be reduced since the electronic data would no longer include the spreadsheet formulae. Alternately, if the attachment comprises a raster image, such as a facsimile transmission, the format reorganizer would convert the image data to text data, thereby again reducing the number of bytes occupied by the electronic data.

The data formatter 218 is in communication with the output of the format reorganizer 216, and is configured to format the electronic data in accordance with one or more data filtration parameters. The data filtration parameters may comprise either default filtration parameters for the network terminal 300, or filtration parameters received from the network terminal 300 together with the transmission request. If the electronic data comprises a text message either attached to an e-mail message or included in the body of an e-mail message, appropriate filtration parameters include:



---

This Page Blank (uspto)

- (a) a "space parameter" for instructing the data formatter 218 to remove one or more of white space, line spacing data and tabbing data from the text of the e-mail message;
- 5 (b) a "punctuation parameter" for instructing the data formatter 218 to remove punctuation from the text of the e-mail message;
- (c) a "font parameter" for instructing the data formatter 218 to remove from the e-mail attachment font data and/or attribute data associated with the text of the e-mail message;
- 10 (d) a "graphics parameter" for instructing the data formatter 218 to remove any graphics data from the e-mail message;
- (e) a "formatting parameter" for instructing the data formatter 218 to replacing paragraph formatting data, such as paragraph justification data and indent data from the text of the e-mail message with predefined format tags;
- 15 (f) a "word abbreviation parameter" for instructing the data formatter 218 to replace recognized words in the e-mail message with pre-defined word abbreviations; and
- (g) a "dictionary lookup parameter" for instructing the data formatter 218 to replace recognized words or phrases in the e-mail message with pre-defined phrase tags for reducing the byte length of the electronic data
- 20

As will be apparent, the foregoing list of filtration parameters is not exhaustive, but may be expanded in accordance with the context of the electronic data. Preferably, the data formatter 218 is configured with a sufficient number of filtration parameters so as to offer several levels of data filtration. Further, the filtration parameters are not limited for use with e-mail attachments, but can also be used in association with the body of an e-mail message. In addition, the filtration parameters are not limited for use with electronic text data, but can be used with other forms of electronic data, such as electronic music files or electronic image files. For instance, if the data server 102 includes electronic music files, the data formatter 218 can be configured to convert stereo channel data to mono channel data, or to boost or reduce the gain of selected ranges of frequencies. If the data server 102 includes electronic image files, the data formatter 218 can be configured to reduce the resolution of the image in accordance with the graphics handling capabilities of the network terminal 300. Other forms of



---

**This Page Blank (uspto)**

filtration parameters will be apparent to those of ordinary skill, and are intended to be encompassed by the present invention.

The data compressor 220 is configured to compress the formatted electronic data to further reduce the size of the data transmission to the network terminals 300.

Preferably, the data compressor 220 is configured to use a standard compression algorithm, such as LZW, to compress the data, however the data compressor 220 may also be configured to use a proprietary compression algorithm suited to the content of the electronic data.

The authorization processor 222 of the data processing system 206 is provided to determine whether the network terminal 300 is authorized to transmit data to selected network resources 104, and to facilitate the transmission of electronic data between the data server 102 and the selected network resource 104 upon command from then network terminal 300. This aspect of the invention will be explained in greater detail below.

Preferably, each network terminal 300 is provided as a network-enabled wireless communications device, such as a wireless-enabled personal data assistant or an e-mail-enabled wireless telephone. However, the network terminals 300 may instead comprise land-based network-enabled communications devices, such as portable computers, or a mixture of wireless and land-based communications devices. As shown in Fig. 3, the network terminal 300 comprises a wireless network interface 302 for interfacing the network terminal 300 with the wireless communications network 112, a user interface 304, and a data processing system 306 in communication with the network interface 302 and the wireless network interface 304. Preferably, the user interface 304 comprises a data entry device 308 (such as keyboard, microphone or writing tablet), and a display device 310 (such as a CRT or LCD display). However, as will be apparent, if the data server 102 contains music files, the user interface 308 will include a speaker instead of the display device 310.

The data processing system 306 includes a central processing unit (CPU) 312, and a non-volatile memory storage device (ROM) 314 (such as an electronic memory) and a read/write memory (RAM) 316 both in communication with the CPU 312.



---

This Page Blank (uspto)



Preferably, the ROM 314 includes a dictionary database 318 which includes a table of recognized words or phrases and associated pre-defined binary phrase tags. As will be explained, the data processing system 306 uses the dictionary database 318 to convert phrase tags received in electronic data transmitted to the network terminal 300 into the corresponding text.

The ROM 314 also includes data which, when loaded into the RAM 316, comprise processor instructions for the CPU 312. The processor instructions establish in the RAM 316 one or more memory objects defining a data reprocessor 320 in communication with the network interface 302, the user interface 304 and the dictionary database 318. Typically, the data reprocessor 320 comprises a data decompressor 322 and a data reformatter 324.

The wireless network interface 302 typically is configured as a data transmitter to provide the wireless communications network 112 with a request for transmission of electronic data. As discussed above, the transmission request can include one or more filtration parameters. The wireless network interface 302 is also configured as a data receiver for receiving an electronic data package from the electronic data transmission system 200 over the wireless communications network 112 in response to the transmission request. The data decompressor 322 is configured to decompress the compressed electronic data received from the electronic data transmission system 200, and to extract the decompressed formatted electronic data from the received data package. The data reformatter 324 is configured to reformat the formatted electronic data using the format tags and the pre-defined phrase tags included in the electronic data, and then to transmit the extracted electronic data to the display device 310 for review.

The process by which an operator of a network terminal 300 receives and transmits electronic data with the network terminal 300 will now be described with reference to Fig. 4. At step 400, the operator of the network terminal 300 logs in to the electronic data communication system 100 by transmitting to the electronic data transmission system 200 the operator's name and assigned password. By logging in to the electronic data communication system 100, the operator will have access to any network resources 104 which have "authorized access" as the user access level and

This Page Blank (uspto)

which have identified the operator as a user authorized to access the network resource 104. However, it should be appreciated that the operator need not log in to the electronic data communication system 100, however the operator will then only have access to the network resources 104 which have established "public access" as the user access level.

At step 402, the electronic data transmission system 200 queries the user registration database 116 with the operator's username and password (if provided) to verify the identity of the operator. The electronic data transmission system 200 then queries the data server 102 for a list of all electronic data available to the operator of the network terminal 300. In the instance where the data server 102 is a POP3 e-mail server, the electronic data transmission system 200 logs in to the data server 102 by providing the data server 102 with the username and password in accordance with the POP3 authentication protocol.

If the username and password is authenticated, the data server 102 transmits to the electronic data transmission system 200 a list of all items of electronic data available to the operator of the network terminal 300. Typically, the electronic data listing will include data identifiers uniquely associated with each item of electronic data, together with a subject field identifying the subject of the associated item of electronic data. The electronic data transmission system 200 then transmits the electronic data listing to the network terminal 300 over the wireless network 112.

Upon receipt, the data processing system 306 displays the subject fields of the electronic data listing on the display device 310. The operator of the network terminal 300 selects an item of electronic data from the electronic data listing for review using the data entry device 308 of the network terminal 300, at step 404, and then transmits the data identifier of the selected electronic data item to the electronic data transmission system 200 over the wireless network 112.

The electronic data transmission system 200 transmits the data identifier to the data server 102, at step 406, requesting transmission of the identified electronic data item. As will be appreciated, if the data server 102 comprises a POP3 e-mail server, the



---

**This Page Blank (uspto)**

electronic data transmission system 200 transmits the data identifier to the data server 102 in accordance with the POP3 authentication protocol.

Typically, the operator of the network terminal 300 initially will not specify a  
5 filtration parameter when transmitting the data identifier to the electronic data transmission system 200. Accordingly, upon receipt of the electronic data item from the data server 102, the data processing system 206 of the electronic data transmission system 200 will query the user registration database 116 with the operator's username and password to determine the default filtration parameter for the operator's wireless  
10 terminal 300. Alternately, however, the operator of the network terminal 300 may transmit a filtration parameter with the data identifier, if the default filtration is not desired.

At step 408, the format reorganizer 216 of the electronic data transmission system 200  
15 converts the electronic data received from the data server into a less memory-intensive format. If no filtration parameter is specified, the data formatter 218 of the electronic data transmission system 200 formats the electronic data received from the format reorganizer 216 in accordance with the default filtration parameter. However, if a filtration parameter is specified, the data formatter 218 formats the electronic data in  
20 accordance with the specified filtration parameter.

The formatting parameter may instruct the data formatter 218 to perform any of a number of different formatting operations on the electronic data. As discussed above, if the data server 102 comprises an e-mail server, the parameter may instruct the data  
25 formatter 218 to perform any of a variety of different e-mail formatting operations on the e-mail message, including the following formatting operations:

- (a) removal of white space, line spacing data and/or tabbing data from the text of message
- 30 (b) removal of punctuation from the text of the message
- (c) removal of font data and/or attribute data associated with the text of the message
- (d) removal of any graphics data from the message

This Page Blank (uspto)

- (e) replacement of paragraph formatting data from the text of the message with predefined format tags
- (f) replacement of recognized words in the message with pre-defined word abbreviations; and
- 5 (g) replacement of recognized words or phrases in the message with pre-defined binary phrase tags

At the end of the data formatting step, preferably the data compressor 220 compresses the formatted electronic data. The electronic data transmission system 200 then  
10 transmits the compressed formatted electronic data to the network terminal 300 over the wireless network 112, at step 410. Typically, the compressed formatted electronic data is transmitted as part of an encrypted data package which includes the network address of the network terminal 300 to provide a level of assurance that the electronic data is not accessible to operators of other network terminals 300.

15 Upon receipt of the data package, the data decompressor 322 of the wireless terminal 300 decrypts and decompresses the received electronic data package, at step 412, and extracts the decompressed formatted electronic data from the data package. Then, if the decompressed electronic data includes format tags, the data reformatter 324  
20 reformats the formatted electronic data using the format tags in the electronic data. If the formatted electronic data includes standard word abbreviations, the data reformatter 324 replaces the word abbreviations with their associated words. Further, if the formatted data also includes pre-defined binary phrase tags, at step 414 the data reformatter 324 queries the dictionary database 318 with the pre-defined binary phrase  
25 tags in order to replace the phrase tags included in the electronic data with their associated words or phrases. The data processing system 306 then displays the decompressed electronic data on the display device 310, at step 416.

If upon review of the electronic data, the operator concludes that the electronic data  
30 was insufficiently or excessively filtered by the electronic data transmission system 200, the operator can request a different level of data filtration at step 414 by transmitting a desired filtration parameter to the electronic data transmission system 200 and repeating steps 406 to 416 above.



---

This Page Blank (uspto)



As will be apparent from the foregoing discussion, since the electronic data transmission system 200 reduces the size of the electronic data prior to transmission to the network terminal 300 (via data formatting and/or compression), the network bandwidth required to transmit the data package is less than that of the prior art transmission systems. Further, since the operator of a network terminal 300 can recursively specify alternate data filtration parameters for the desired electronic data, the operator can tailor the level of filtration in accordance with the data resolution capabilities of the network terminal 300 and the contents/characteristics of the electronic data.

10

Thus far in the discussion, the process performed by the electronic data communication system 100 has focussed on its ability to transmit filtered/compressed electronic data to network terminals 300. However, the electronic data communication system 100 can also be used to transmit electronic data to network resources 104 upon command from the network terminals 300. This aspect of the invention will be described with reference to Fig. 5.

15

As shown therein, at step 500 the operator of the network terminal 300 selects a network resource 104 by transmitting to the electronic data transmission system 200 a request over the wireless network 112 for a list of available network resources 104. The network resource query may be based upon any desired criteria, including print turn-around time and page size (where the target network resource 104 is a printer), price, and geography. In addition, the operator may provide the electronic data transmission system 200 with the geographical coordinates of the wireless terminal 300 to determine the operator's nearest network resources. The operator may provide its geographical coordinates through any suitable mechanism known to those skilled in the art, including latitude/longitude co-ordinates, GPS, and wireless triangulation.

20

25

At step 502, the authorization processor 222 of the electronic data transmission system 200 transmits to the wireless terminal 300 a list of pseudo-names associated with each network resource 104 which satisfies the designated search criteria. If the operator logged in to the electronic data communication system 100, the authorization processor 222 generates the required list by querying the resource database 114 with the operator's username to identify the network resources 104 with which the operator

30



---

This Page Blank (uspto)

- has been authorized to communicate. Accordingly, in this scenario the pseudo-name list will include both "public access" network resources 104 and "authorized access" network resources 104 with which the operator has been authorized to communicate. Also, if the user is member of an enterprise having network resources 104 registered
- 5 with the electronic data communication system 100, the pseudo-name list will also identify network resources 104 which have been registered by the enterprise for "private access". Otherwise, the pseudo-name list will only identify network resources 104 registered for public access.
- 10 Upon receipt of the resource list, the operator selects a network resource 104 from the list. Then, at step 504, the operator of the network terminal 300 transmits a transmission request to the electronic data transmission system 200, specifying the pseudo-name of the selected network resource 104. The authorization processor 222 of the electronic data transmission system 200 queries the resource database 114 with
- 15 the received pseudo-name for the resource record associated with the pseudo-name. The authorization processor 222 then extracts the user access level from the user access level field of the retrieved resource record, at step 506, and verifies that the network terminal 300 is still authorized to communicate with the selected network resource 104. As will be apparent from the foregoing discussion, if the user access
- 20 level field specifies "public access" for the network resource 104, the network terminal 300 will be automatically authorized to communicate with the network resource 104.
- However, if the user access level field specifies "private access" for the network
- 25 resource 104, the authorization processor 222 determines the network address of the network terminal 300 from the transmission request transmitted by the network terminal 300, and then queries the user access level sub-field with the terminal's network address to determine whether the network terminal 300 is still authorized to communicate with the network resource 104. On the other hand, if the user access
- 30 level field specifies "authorized access" for the network resource 104, the authorization processor 222 queries the user access level sub-field with the operator's username to determine whether the network terminal 300 is still authorized to communicate with the network resource 104.



---

This Page Blank (uspto)

If the query at step 506 reveals that the network terminal 300 is no longer authorized to communicate with the network resource 104, at step 508 the authorization processor 222 provides the network terminal 300 with a notification that the network terminal 300 is not authorized for communication with the selected resource 104. However, if  
5 the query at step 506 reveals that the network terminal 300 is still authorized to communicate with the network resource 104, the authorization processor 222 queries the network address field of the resource record associated with the network resource 104 for the network address of the network resource 104. The authorization processor 222 then transmits the original unfiltered uncompressed electronic data to the network  
10 resource 104 at the specified network address, at step 510.

Typically, the network resource 104 will comprise a land-based network resource, accordingly the authorization processor 222 will transmit the unfiltered uncompressed electronic data to the network resource 104 over the land-based communications  
15 network 108. As will be apparent, this mechanism of transmitting electronic data to land-based network resources 104 is advantageous since it allows the original electronic data to be transmitted to the network resource 104 without requiring significant wireless network bandwidth. However, the network resource 104 may also comprise a wireless-based network resource. Although transmission of the original  
20 unfiltered uncompressed electronic data to the network resource 104 would increase the wireless bandwidth requirements of the electronic data communication system 100, the transmission of the electronic data to the network resource 104 would not be hindered by the processing power limitations of the network terminal 300.

25 The foregoing description is intended to be illustrative of the preferred embodiment of the present invention. Those of ordinary skill may envisage certain additions, deletions and/or modifications to the described embodiment which, although not explicitly described herein, are encompassed by the spirit or scope of the invention, as defined by the claims appended hereto.

This Page Blank (uspto)

**WE CLAIM:**

1. An electronic data transmission system comprising:  
a data receiver for receiving a request for transmission of electronic data to a network terminal over a communications network, the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data;  
a data processing system in communication with the data receiver for formatting the electronic data in accordance with the at least one data filtration parameter; and  
a data transmitter in communication with the data processing system for transmitting the formatted data to the network terminal over the communications network.
2. The electronic data transmission system according to claim 1, wherein the electronic data comprises at least one word having an associated phrase tag, and the data processing system is configured to replace each said at least one word with the associated phrase tag.
3. The electronic data transmission system according to claim 1 or 2, the electronic data comprises at least one word having an associated abbreviation, and the data processing system is configured to replace each said word with the associated abbreviation.
4. The electronic data transmission system according to any of claims 1 to 3, wherein the electronic data comprises text data, and the data processing system is configured to remove from the electronic data at least one of font data and attribute data associated with the text data.
5. The electronic data transmission system according to any of claims 1 to 4, wherein the electronic data comprises text data, the text data having formatting data associated therewith, and the data processing system is configured to replace the formatting data with predefined format tags to reduce a byte length of the electronic data.
6. The electronic data transmission system according to any of claims 1 to 5, wherein the electronic data includes graphics data, and the data processing system is configured to remove the graphics data from the electronic data.



---

This Page Blank (uspto)



7. The electronic data transmission system according to any of claims 1 to 6, wherein the data receiver is configured to receive a request for retransmission of the transmitted electronic data between the network terminal and a network resource, and the data processing system is configured to determine an authorization for the retransmission in accordance with an access level defined for the network resource.
8. The electronic data transmission system according to claim 7, wherein the data processing system is in communication with a resource registry for identifying the user access level for the network resource.
9. The electronic data transmission system according to claim 8, wherein the network resource has a network address, the retransmission request includes an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address, and the data processing system is configured to determine the authorization from the pseudo-name.
10. A method of electronic data transmission, comprising the steps of:  
receiving a request for transmission of electronic data over a communications network to a network terminal, the transmission request including at least one data filtration parameter defining a desired resolution of the electronic data;  
formatting the electronic data in accordance with the at least one data filtration parameter; and  
transmitting the formatted data to the network terminal over the communications network.
11. The method according to claim 11, wherein the electronic data comprises at least one word having an associated phrase tag, and the formatting step comprises replacing each said at least one word with the associated phrase tag.
12. The method according to claim 10 or 11, wherein the electronic data comprises at least one word having an associated abbreviation, and the formatting step comprises replacing each said word with the associated abbreviation.



---

**This Page Blank (uspto)**

13. The method according to any of claims 10 to 12, wherein the electronic data comprises text data, and the formatting step comprises removing from the electronic data at least one of font data and attribute data associated with the text data.
14. The method according to any of claims 10 to 13, wherein the electronic data comprises text data, the text data having formatting data associated therewith, and the formatting step comprises replacing the formatting data with predefined format tags to reduce a byte length of the electronic data.
15. The method according to any of claims 10 to 14, wherein the electronic data includes graphics data, and the formatting step comprises removing the graphics data from the electronic data.
16. The method according to claim 10, further comprising the steps of:
  - receiving a request for transmission of the extracted electronic data between the network terminal and a network resource; and
  - determining an authorization for communication with the network resource in accordance with an access level defined for the network resource.
17. The method according to claim 16, wherein the network resource has a network address, the data server is in communication with a resource registry for identifying a user access level for the network resource, and the authorization determining step comprises querying the resource registry with the network address.
18. The method according to claim 16, wherein the network resource has a network address, and the transmission request includes an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address.
19. An electronic data terminal comprising:
  - a data receiver for receiving over a communications network a data package from a data server;
  - a data processing system in communication with the data receiver for extracting electronic data from the data package; and



---

**This Page Blank (uspto)**

a data transmitter in communication with the data processing system for providing the data server with a request for retransmission of the electronic data, the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

20. The electronic data terminal according to claim 19, wherein the electronic data comprises at least one phrase tag having an associated at least one word, and the data processing system includes a dictionary for replacing each said phrase tag with the associated at least one word.

21. The electronic data terminal according to claim 19 or 20, wherein the electronic data comprises at least one abbreviation having an associated word, and the data processing system is configured to replace each said abbreviation with the associated word.

22. The electronic data terminal according to any of claims 19 to 21, wherein the electronic data comprises at least one format tag having associated formatting data, and the data processing system is configured to replace each said format tag with the associated formatting data.

23. A method of electronic data transmission, comprising the steps of:  
receiving over a communications network a data package from a data server;  
extracting electronic data from the data package; and  
in accordance with a resolution of the extracted electronic data providing the data server with a request for retransmission of the electronic data, the retransmission request including at least one data filtration parameter defining a desired resolution for the retransmitted electronic data.

24. The method according to claim 23, wherein the electronic data comprises at least one phrase tag having an associated at least one word, and the extracting step comprises replacing each said phrase tag with the associated at least one word.

25. The method according to claim 23 or 24, wherein the electronic data comprises at least one abbreviation having an associated word, and the extracting step comprises replacing each said abbreviation with the associated word.

**This Page Blank (uspto)**

26. The method according to any of claims 23 to 25, wherein the electronic data comprises at least one format tag having associated formatting data, and the extracting step comprises replacing each said format tag with the associated formatting data.

27. The method according to claim 23, further comprising the step of transmitting to the data sever a request for transmission of the extracted electronic data to a network resource, the network resource having a network address, the transmission request including an indication of the network address, the network address indication comprising a pseudo-name associated with the network resource but distinct from the network address.

---

**This Page Blank (uspto)**



1/5


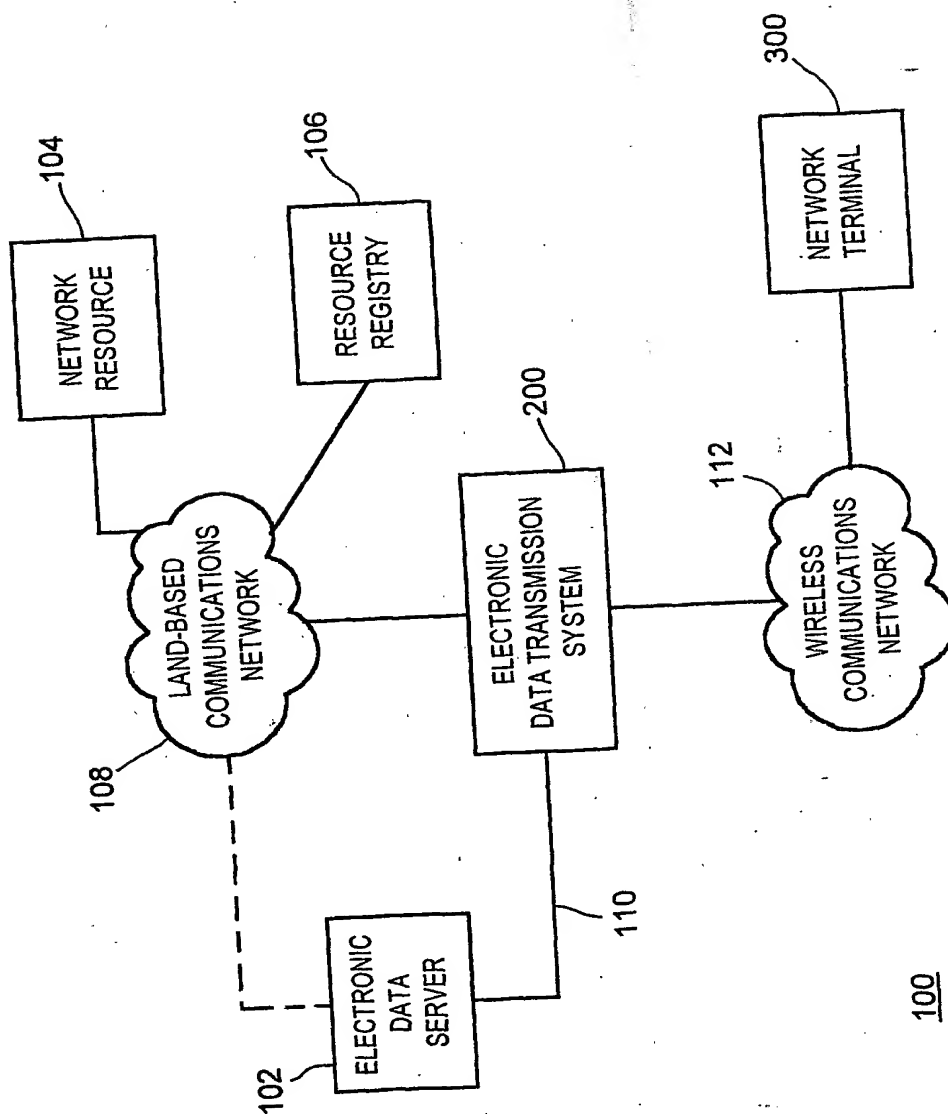


FIG. 1

---

**This Page Blank (uspto)**


FIG. 2

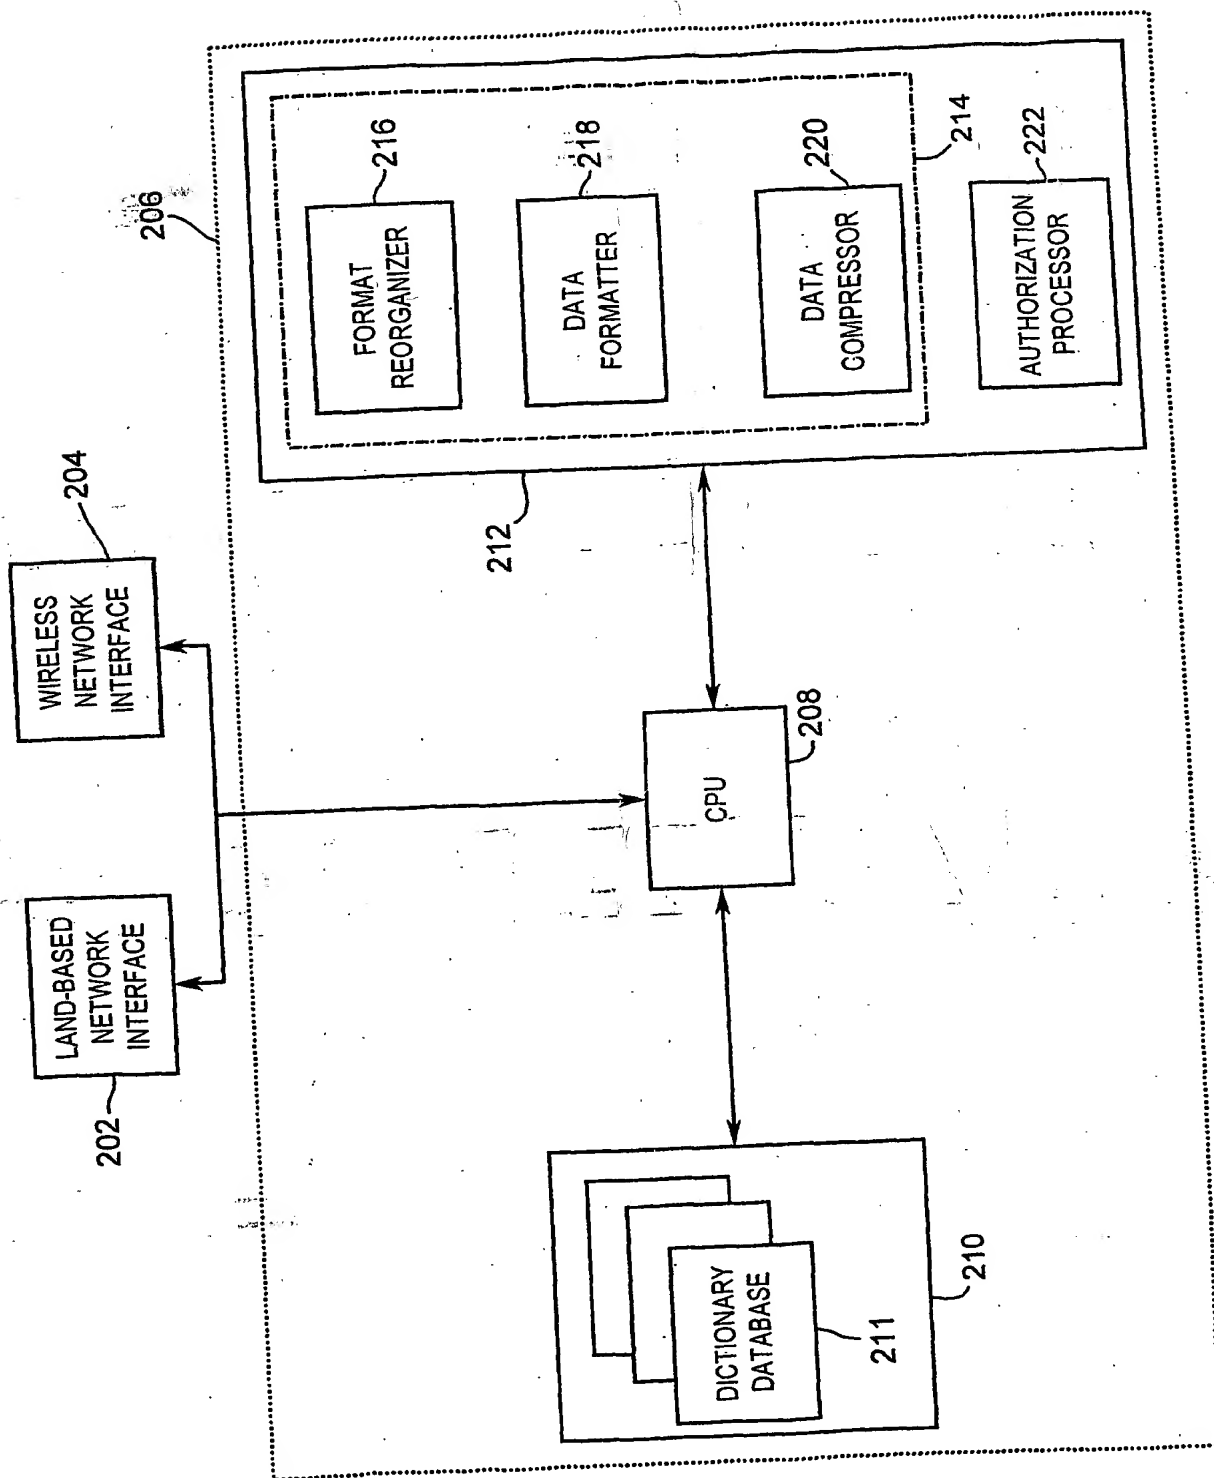

This Page Blank (uspto)


3/5

FIG. 3

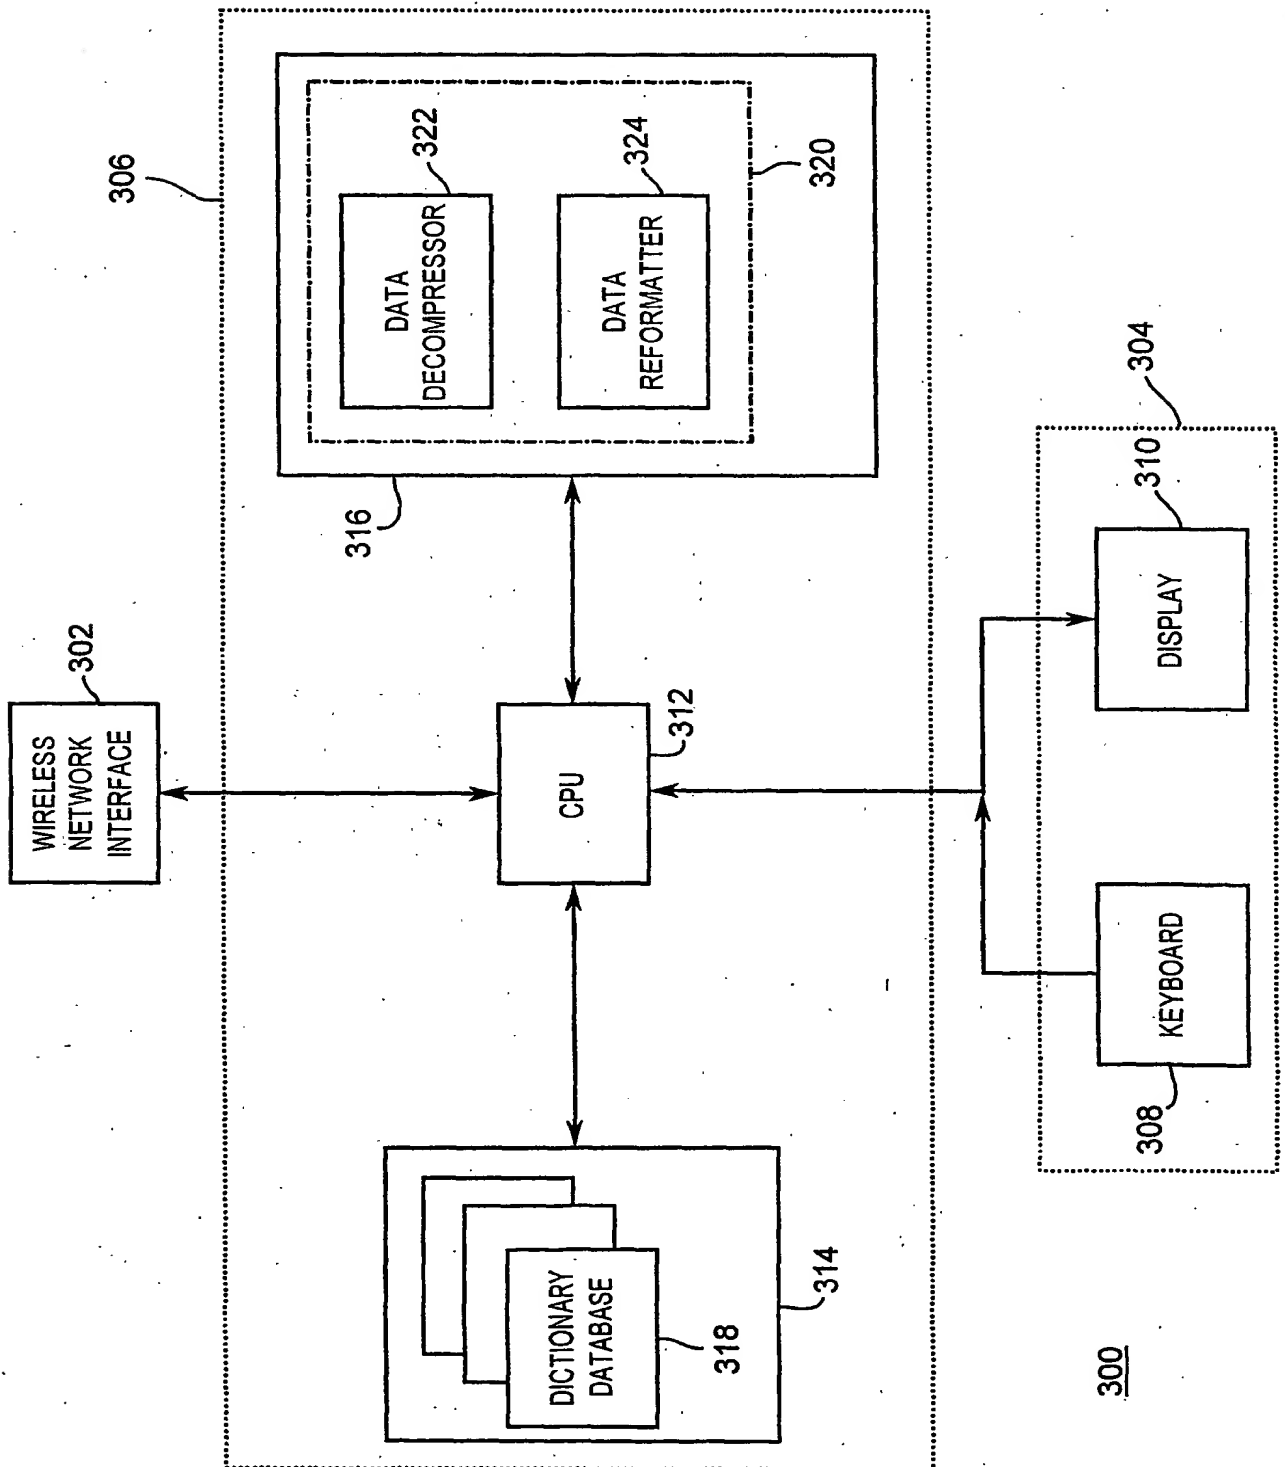

This Page Blank (uspto)


4/5

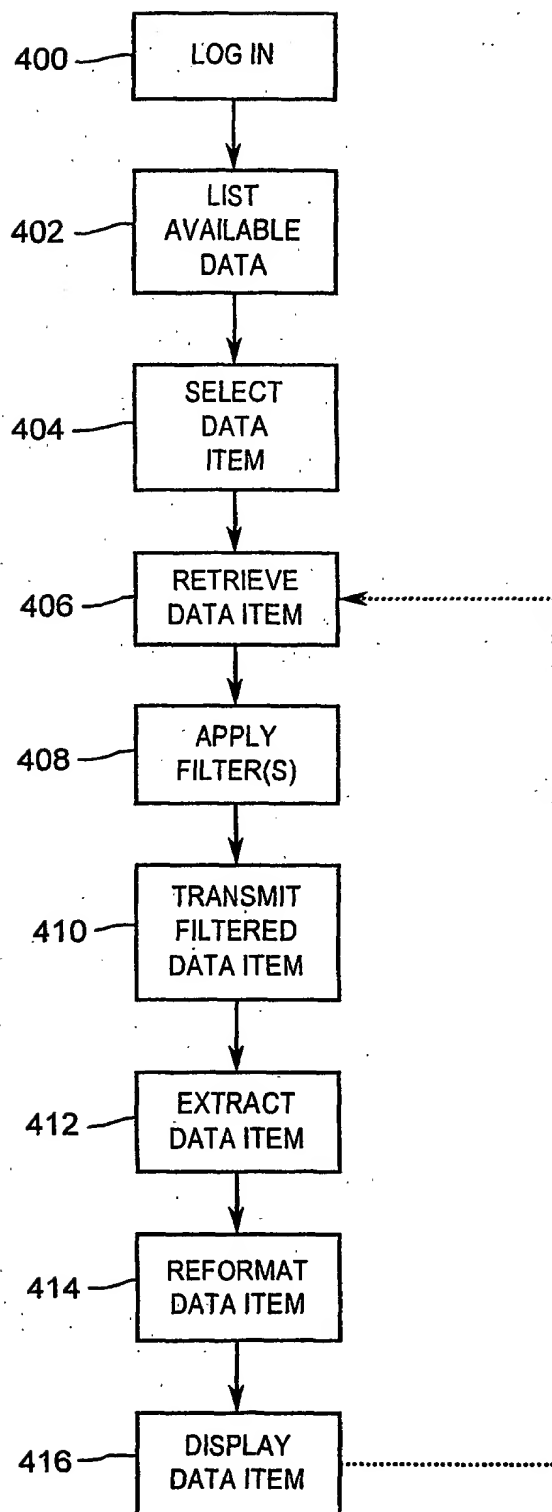FIG. 4

This Page Blank (uspto)



5/5

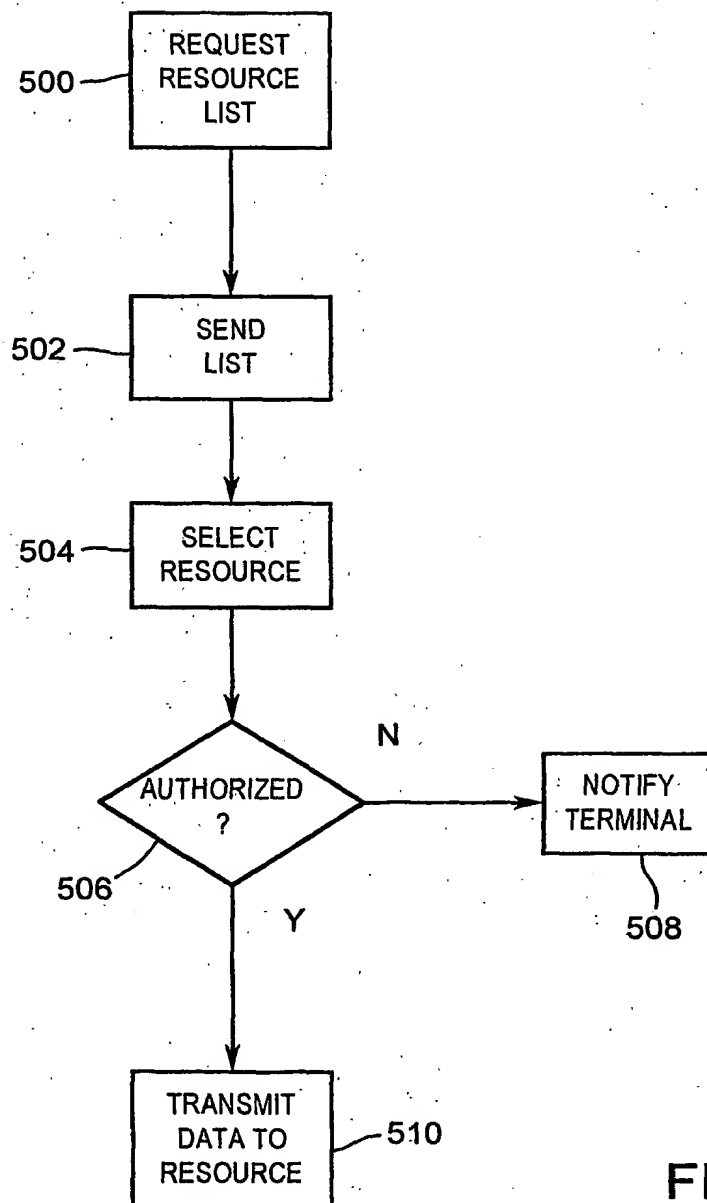FIG. 5

This Page Blank (uspto)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number  
**WO 01/69855 A3**

(51) International Patent Classification<sup>7</sup>: **H04L 12/28**,  
29/06

(21) International Application Number: PCT/CA01/00303

(22) International Filing Date: 13 March 2001 (13.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2,301,996 13 March 2000 (13.03.2000) CA

(71) Applicant (for all designated States except US): **SPICER CORPORATION** [CA/CA]; 221 McIntyre Drive, Kitchener, Ontario N2R 1G1 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SPICER, Steven** [CA/CA]; 119 Champlain Crescent, Kitchener, Ontario N2B 2Y7 (CA). **MARTIN, Christopher** [CA/CA]; 66

Mooregate Crescent, Apt. 1304, Kitchener, Ontario N2M 5E6 (CA). **PIDDUCK, Patrick** [CA/CA]; 267 Castlefield Avenue, Waterloo, Ontario N2K 2M4 (CA). **LEHAN, Tim** [CA/CA]; 168 Samuel Street, Kitchener, Ontario N2H 1R1 (CA). **PEREIRA, Kathy** [CA/CA]; 255 Newport Place, Waterloo, Ontario N2T 1T9 (CA).


(74) Agents: **GRAHAM, Robert, J.** et al.; Gowling Lafleur Henderson LLP, Suite 4900, Commerce Court West, Toronto, Ontario M5L 1J3 (CA).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CO, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: LIMITED-BANDWIDTH ELECTRONIC DATA COMMUNICATION SYSTEM

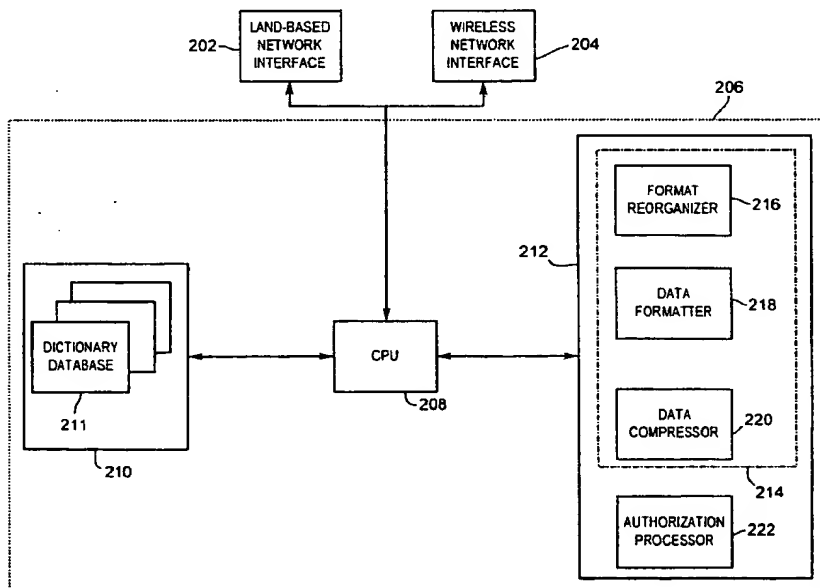

(57) Abstract: A limited-bandwidth network electronic data communication system (100) includes an electronic data transmission system (200) and a network terminal (300) in communication with the electronic data transmission system over a communications network (112). The electronic data transmission system includes a data receiver, a data formatter (218) and a data transmitter. The electronic data terminal includes a data receiver, a data reformatter and a data transmitter. Using the data transmitter an operator of the electronic data terminal transmits a request for transmission of an electronic message from the electronic data transmission system to the electronic data terminal. Upon receipt of the transmission request, the data formatter of the electronic data transmission system formats the electronic message in accordance with

a default filtration parameter associated with the electronic data terminal, and assembles the electronic message as part of an electronic data package. Alternately, the retransmission request may include at least one data filtration parameter defining a desired alternate resolution for the electronic message, in which case the data formatter of the electronic data transmission system formats the electronic message in accordance with the specified filtration parameter. When the formatting step is completed, the data transmitter of the electronic data transmission system transmits the electronic data package to the electronic data terminal. Upon receipt of the electronic data package, the data reformatter of the electronic data terminal extracts the electronic message from the data package for review by the operator of the electronic data terminal.

WO 01/69855 A3

This Page Blank (uspto)



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

**(88) Date of publication of the international search report:**

27 June 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

This Page Blank (uspto)

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 01/00303

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L12/28 H04L29/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	LILJEBERG M ET AL: "Enhanced Services for World-Wide Web in Mobile WAN Environment" 1 April 1996 (1996-04-01), UNIVERSITY OF HELSINKI, DEPARTMENT OF COMPUTER SCIENCE, PUBLICATION N° C-1996-28, HELSINKI, FINLAND XP002162553 page 2, line 1 -page 9, line 35; figures ---	1,6-8, 10,15, 19,23
Y	WO 00 11850 A (GEOWORKS CORP.) 2 March 2000 (2000-03-02)  page 5, line 28 -page 9, line 19; figures --- -/--	1,3,7, 10,12, 16,19, 21,23,25

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

23 April 2002

Date of mailing of the international search report

29/04/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Geoghegan, C

**This Page Blank (uspto)**



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 01/00303

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 958 006 A (EGGLESTON ET AL.) 28 September 1999 (1999-09-28)  column 4, line 4 -column 15, line 61; figures  ---	1, 3, 7, 10, 12, 16, 19, 21, 23, 25
A	ZENEL B ET AL: "Intelligent communication filtering for limited bandwidth environments" WORKSHOP ON HOT TOPICS IN OPERATING SYSTEMS, XX, XX, 4 May 1995 (1995-05-04), pages 28-34, XP002094011 page 28, line 12 -page 34, line 11; figures  ---	1-27
A	WO 98 36344 A (LEXTRON SYSTEMS INC.) 20 August 1998 (1998-08-20) page 6, line 7 -page 22, line 29; figures  ---	1, 10, 19, 23
A	US 5 764 235 A (HUNT ET AL.) 9 June 1998 (1998-06-09) column 4, line 63 -column 13, line 67; figures  -----	1, 10, 19, 23

This Page Blank (uspto)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 01/00303

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0011850	A	02-03-2000	AU 5682199 A EP 1106007 A1 WO 0011850 A1	14-03-2000 13-06-2001 02-03-2000
US 5958006	A	28-09-1999	US 5771353 A US 5764899 A	23-06-1998 09-06-1998
WO 9836344	A	20-08-1998	US 6076109 A CN 1270678 T EP 0956528 A2 JP 2000514940 T US 6243596 B1 WO 9836344 A2 US 6319010 B1 US 2001021664 A1	13-06-2000 18-10-2000 17-11-1999 07-11-2000 05-06-2001 20-08-1998 20-11-2001 13-09-2001
US 5764235	A	09-06-1998	NONE	

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

This Page Blank (uspto)